










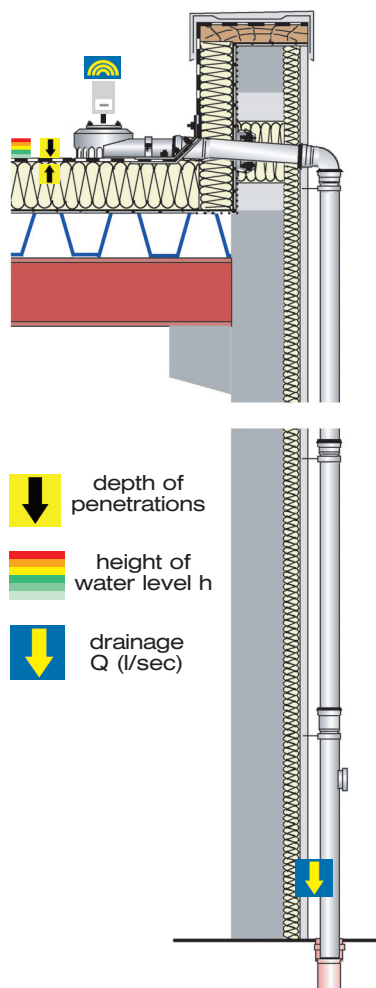

LORO-X overview LORO-DRAINJET® siphonic scupper drainage system



	main drainage		emergency drainage	
	siphonic drainage		siphonic drainage	
	power		power	
				
depth of penetration  	0 mm		0 mm	
nominal inner diameter	DN 50	DN 70	DN 50	DN 70
clamping flange 90°	LX-Nr: LX 789	LX-Nr: LX 636	LX-Nr: LX 790	LX-Nr: LX 637
clamping flange 45°	LX-Nr: LX 789	LX-Nr: LX 636	LX-Nr: LX 790	LX-Nr: LX 637
adhesive bonding flange 45°	LX-Nr: LX 789	LX-Nr: LX 636	LX-Nr: LX 790	LX-Nr: LX 637
weir height h  high > 60mm medium < 50mm low < 40mm	0 mm	0 mm	40 mm	60 mm
height of water level h  high > 75mm medium < 55mm low < 35mm	55 mm	55 mm	75 mm	75 mm
drainage Q (l/s)  24 l/s 20 l/s 16 l/s 12 l/s 8 l/s 4 l/s	7.0 l/s	16.0 l/s	9.0 l/s	14.5 l/s
silent power class  power silent power silent	power	power	power	power