

Specification Sheet LX 2203

Roof Drainage Series LORO-X Light with bonding flange

Emergency drainage

Gravity flow

Silent Power

Discharge rate:	4,5 l/s
Water height:	75 mm
Roof penetration:	-
Diameter:	DN 100
LX-Number:	LX 2202
Weir height:	45 mm
Drain:	ventilated
Downpipe:	not ventilated
Downpipe height:	4,2 m
Drainage:	into the open

LX 2203 Piece list

1 x Art.-No. Choose drain on page 2!

1 x Art.-No. 01401.100X, LORO-X Pipe with one socket

2 x Art.-No. 00300.100X, LORO-X Bend

1 x Art.-No. 01201.100X, LORO-X Pipe with one socket

1 x Art.-No. 01011.100X, LORO-X Pipe with one socket


1 x Art.-No. 00320.100X, LORO-X Bend

6 x Art.-No. 00911.100X, LORO-X Sealing elements

1 x Art.-No. 00986.000X, LORO-X Lubricant


1 x Art.-No. 19842.100X, LORO-X Thermal insulation

hQ - Discharge curve

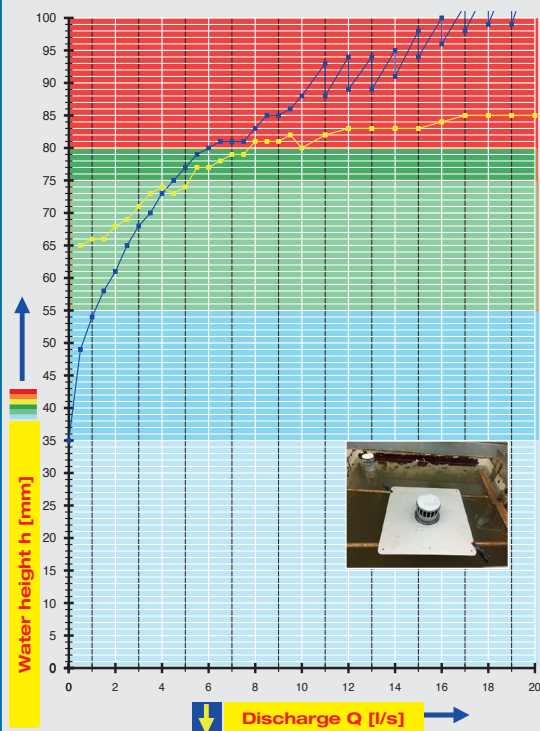

System power

CAD

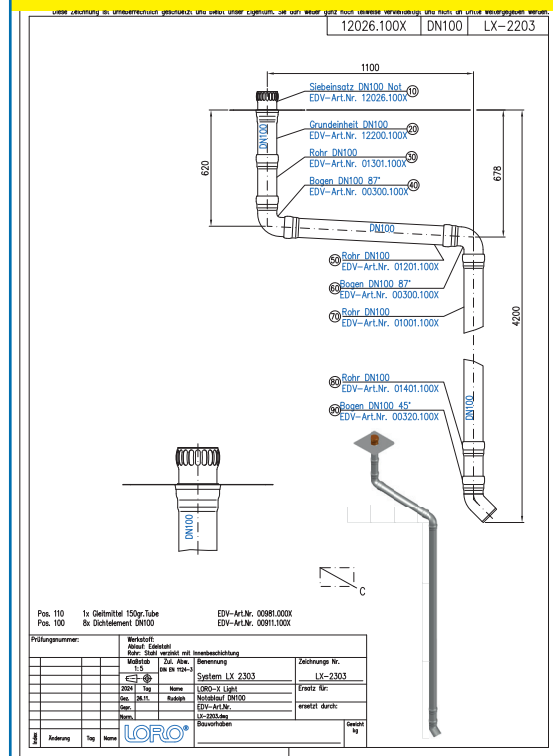


System shape

Water height	mm	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
Discharge	l/sec	-	-	-	-	-	0,5	1,1	1,8	2,5	3,5	4,5	6,0	9,0	10,4	14,0	16,7
Silent												SP		Power			

Please choose the respective base unit and bottom unit!

DN 100



Drain
Emergency drainage
Art.-No. 12026.100X

Flange made of stainless steel

without thermal insulation:

LX2203-20X

one-piece
base unit, vertical
300 x 300 No. 12100.100X



with thermal insulation:

LX2203-20X

one-piece
base unit, vertical
300 x 300 No. 12100.100X
and thermal insulation No. 19842.100X



Flange made of stainless steel

without thermal insulation:

LX2203-20X


two-piece
base unit, vertical
300 x 300 Nr. 12100.100X
bottom unit, vertical
No. 12101.100X



with thermal insulation:

LX2203-20X

two-piece
base unit, vertical
300 x 300 Nr. 12100.100X
bottom unit, vertical
No. 12101.100X
and thermal insulation No. 19842.100X

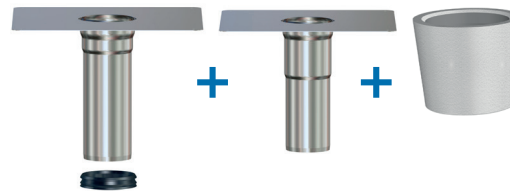

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.