

Specification sheet LX 650

Parapet drainage system

Series 43 Parapet-Direct with basin

Main drainage

Gravity flow


Silent

Discharge rate:	2.3 l/s
Water height:	35 mm
Roof penetration:	52 mm
Diameter:	DN 70
LX-Number:	LX 650
Weir height:	0 mm
Drain:	ventilated
Downpipe:	ventilated
Downpipe height:	4.2 m
Drainage:	in sewer
Flange form:	bonding flange 45°

LX 650 Piece list


- | | |
|--|--|
| 1 x Art.-No. 01330.070X, Parapet direct drain | 1 x Art.-No. 01001.070X, LORO-X Pipe with one socket |
| 1 x Art.-No. 01317.000X, LORO-X insulation block | 1 x Art.-No. 05510.070X, LORO-X Standpipe |
| 1 x Art.-No. 13235.070X, LORO Sliding flange | 5 x Art.-No. 00911.070X, LORO-X Sealing elements |
| 1 x Art.-No. 01301.070X, LORO-X Pipe with one socket | 3 x Art.-No. 00973.070X, LORO-X Pipe clips |
| 1 x Art.-No. 00200.CC0X, LORO-X Branch | 1 x Art.-No. 00986.000X, LORO-X Lubricant |
| 1 x Art.-No. 13217.070X, Ventilation piece | 3 x Art.-No. 09603.200X, LORO-X Hanger bolt |

hQ - Discharge curve

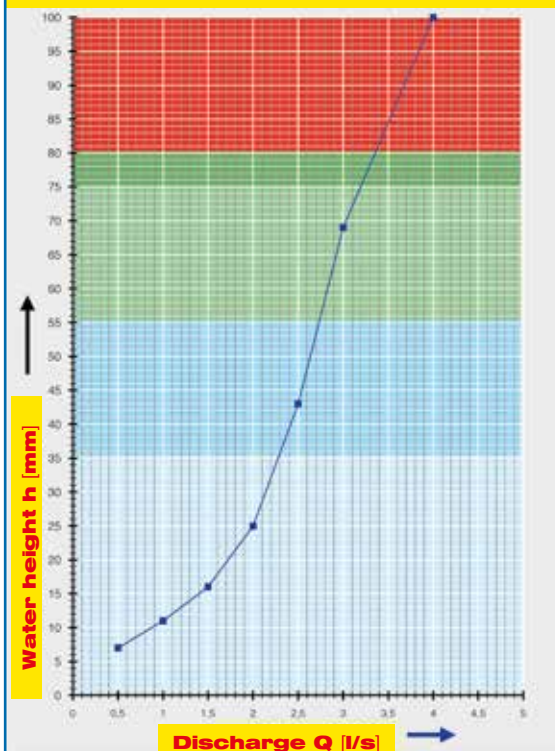

System power

CAD

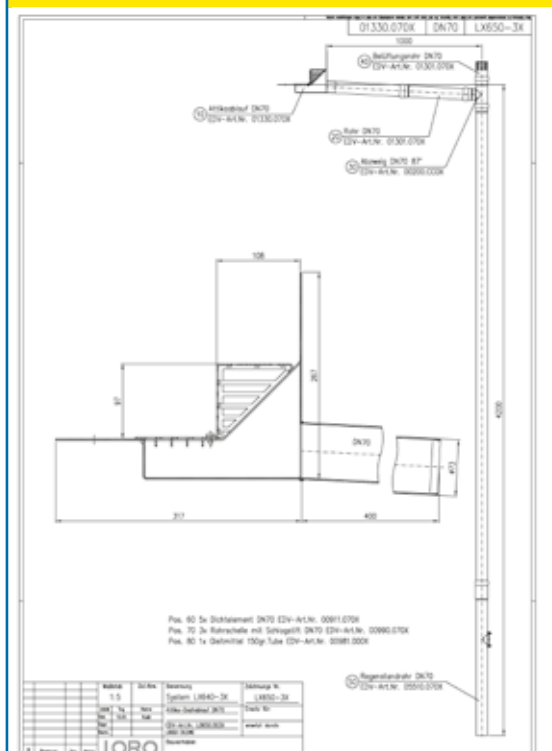

System shape

Water height	mm	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/s		0.9	1.4	1.7	2.0	2.1	2.3	2.4	2.6	2.7	2.8	2.9	2.9	3	3.2
Silent																

LORO-X Parapet-Direct, with basin

DN 70


LX650-3X

Series 43

Drain Art.-No. 01330.070X

Weight: 7.0 kg

with bonding flange
for bituminous roofing sheets

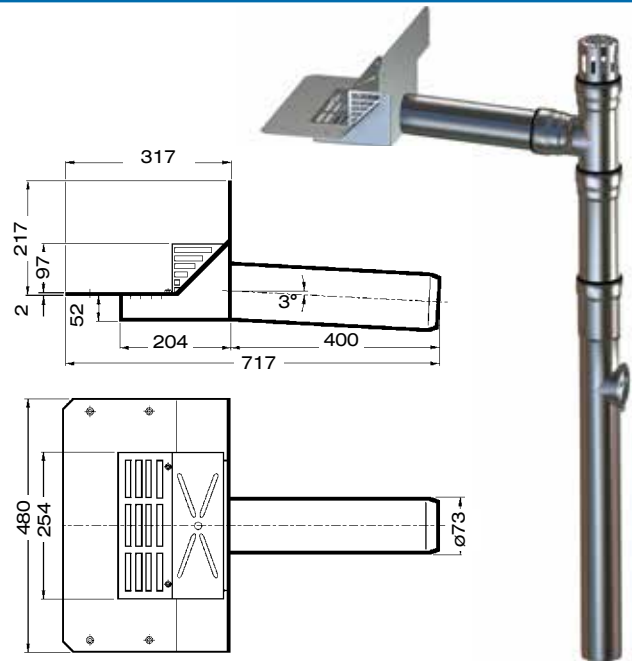


Sliding flange for

LORO parapet direct drains

with pre-installed connection sleeve for vapor barrier made of bituminous roofing sheets, made of galvanized steel, including fastening screws

Art.-No. 13235.070X

Weight: 1.4 kg

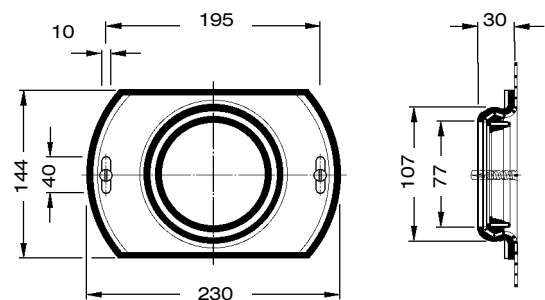

Trace heating: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be equipped with a trace heating.