

Specification sheet LX 1375

Parapet drainage



Series 43 LORO-X DUOFLUX® Pipe in pipe with siphonic spout

Main drainage	Emergency drainage
Gravity flow	Siphonic flow
Silent-Power	Silent-Power
Discharge rate: 3,6 l/sec	Discharge rates: 4,2 l/sec
Water height: 35 mm	Water height: 75 mm
Roof penetration: 103 mm	Roof penetration: 103
Diameter: DN 100	Diameter: DN 50
Weir height: 0 mm	Weir height: 40 mm
Drain: ventilated	Drain: ventilated
Downpipe: ventilated	Downpipe: not ventilated
Downpipe height: 4,2 m	Downpipe height: 0,6 m
Drainage: in sewer	Drainage: on floor
Flange: Bonding flange	Flange: Bonding flange

LX Piece list 1375

1	x	Art.-No.	<u>13508.100X</u>	LORO-X DUOFLUX® Parapet drain
1	x	Art.-No.	<u>01211.100X</u>	LORO-X Pipe with one socket
1	x	Art.-No.	<u>01203.050X</u>	LORO-X Pipe with one socket
1	x	Art.-No.	<u>13501.100X</u>	LORO-X Siphonic spout
1	x	Art.-No.	<u>13500.100X</u>	LORO-Branch with bend
1	x	Art.-No.	<u>12325.100X</u>	LORO-X Sliding flange
2	x	Art.-No.	<u>00806.100X</u>	LORO-X Anchor clips

1 x Art.-No. [01101.100X](#), LORO-X Pipe with one socket
 1 x Art.-No. [55154.100X](#), LORO-X Stand pipe with HSU
 4 x Art.-No. [00911.100X](#), LORO-X Sealing elements
 2 x Art.-No. [00911.050X](#), LORO-X Sealing elements
 3 x Art.-No. [00975.100X](#), LORO-X Pipe clips
 3 x Art.-No. [09604.200X](#), LORO-X Threade rods
 1 x Art.-No. [00986.000X](#), LORO-X Lubricant
 1 x Art.-No. [13217.100X](#), LORO-X Ventilation piece

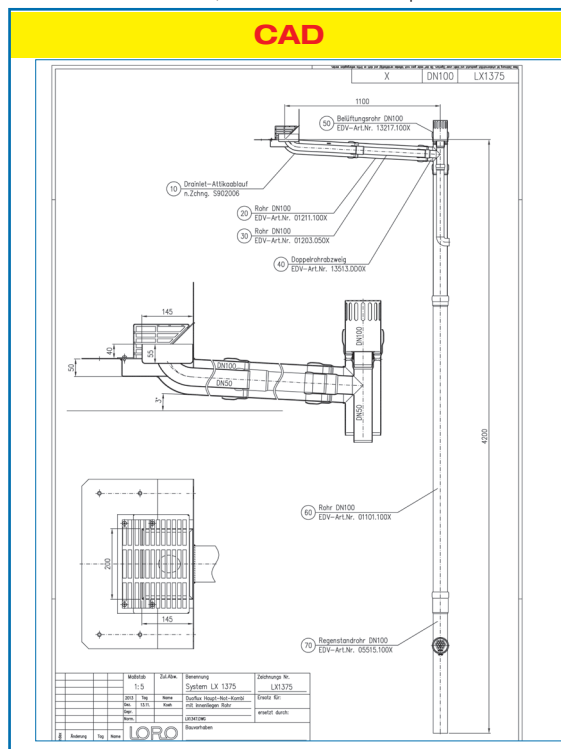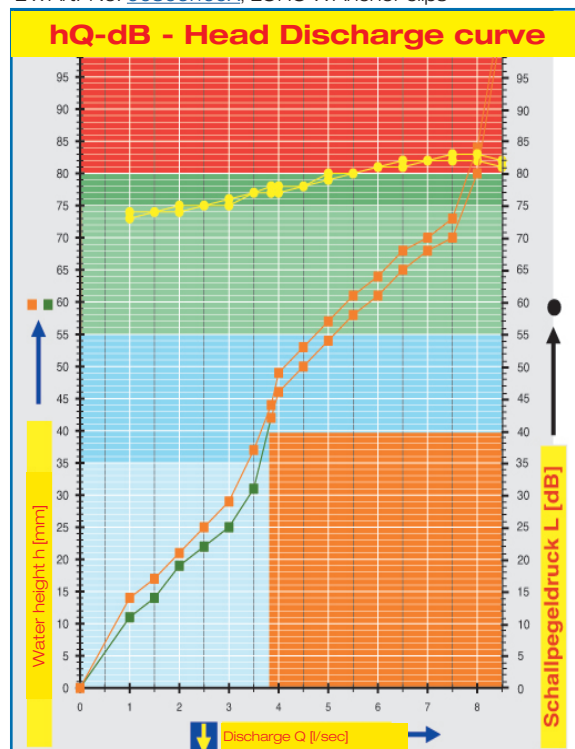

Water height	mm		10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge normal curve	l/s		-	1,6	2,2	3,0	3,4	3,6								
Discharge main line to	l/s								3,8	4,0	4,5	5,1	5,8	6,5	7,5	7,8
		Silent														




LORO-X DUOFLUX® Main emergency combination Parapet drain,

LX1375-3X

Drain: Art.-No. [13508.100X](#)

Weight: 9,6 kg

with bonding flange
and siphonic spout
for bituminous roofing sheets

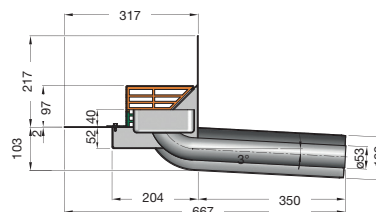


LORO-Siphonic spout

made of galvanized steel,

Art.-No. [13501.100X](#)

Weight: 6,7 kg

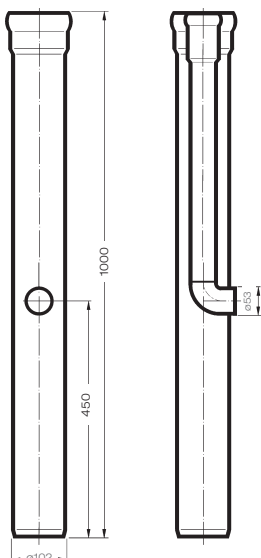


LORO-Stand pipe with High performance safety over flow

made of galvanized steel,

Art.-No. [55154.100X](#)

Weight: 6,6 kg

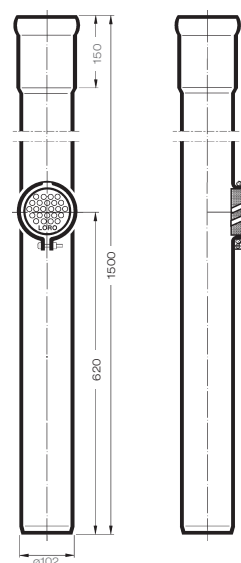


LORO-Branch 87° with bend

made of galvanized steel,

Art.-No. [13500.100X](#)

Weight: 3,1 kg




LORO-X Ventilation piece

made of galvanized steel,

Art.-No. [13217.100X](#)

Weight: 0,7 kg



Heat tracing: LOROWERK recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.