

Specification sheet LX2183


Parapet drainage RAINSTAR® as rectangular spout

Emergency drainage

Gravity flow

Silent


Discharge rate:	1,5 l/sec
Water height:	75 mm
Roof penetration:	82 mm
Diameter:	DN 50
LX-Number:	LX 2183
Weir height:	35 mm
Drain:	ventilated
Downpipe:	ventilated
Downpipe height:	0 m
Drainage:	on floor
Flange form:	Clamping flange

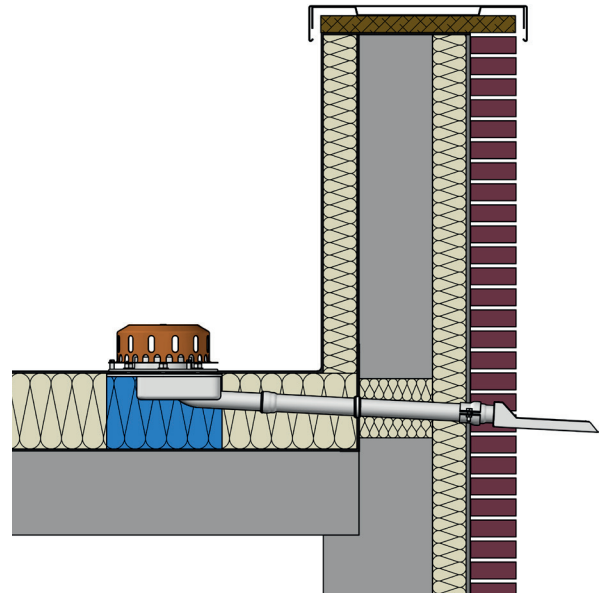

LX 2183 Piece list


- 1 x Art.-No. 01391.040X, LORO-X RAINSTAR® Parapet drain
- 1 x Art.-No. 01401.040X, LORO-X Pipe with one socket
- 1 x Art.-No. 13232.040X, LORO-X Sliding flange
- 1 x Art.-No. 15196.040X, LORO-X Rectangular emergency spout
- 1 x Art.-No. 00911.040X, LORO-X Sealing element
- 1 x Art.-No. 00986.000X, LORO-X Lubricant

hQ - Head Discharge curve

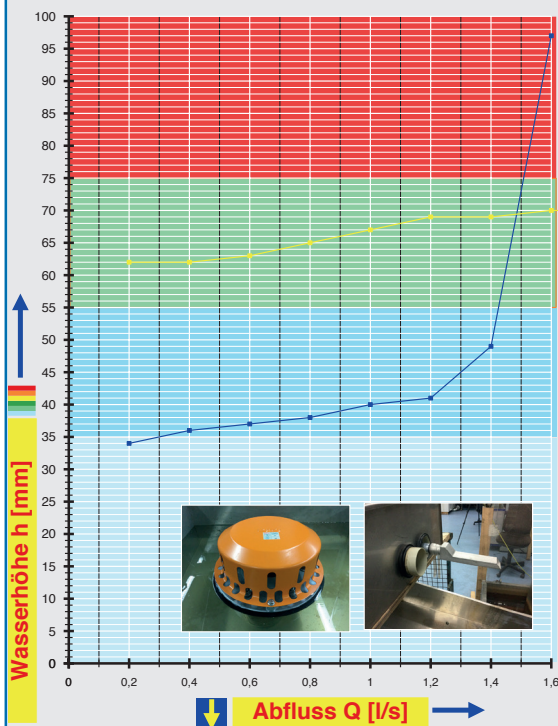

Systempower

CAD

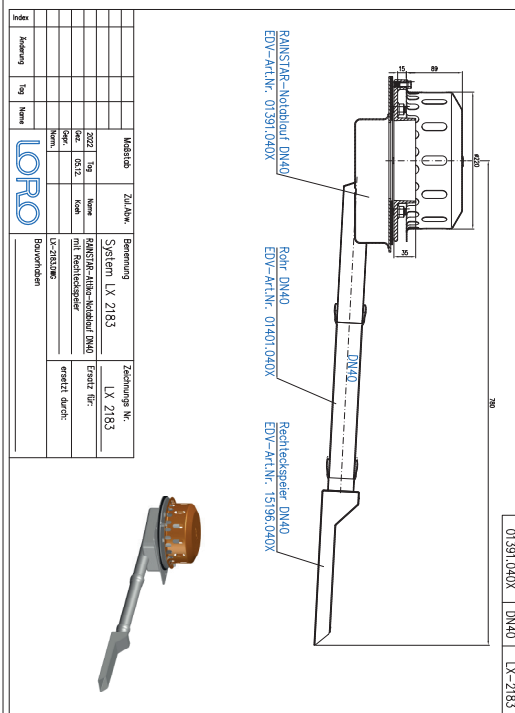

Systemshape

Water height	mm	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
Discharge	l/sec	-	-	-	-	1,0	1,3	1,4	1,42	1,44	1,46	1,48	1,5	1,53	1,56	1,58	1,59	1,60
Silent																		

LORO-X Rectangular Emergency spout




DN 40

LX2183-20X

Series 88 (RB) Rectangular spout

Art.-No. 15196.040X

Weight: 0,6 kg

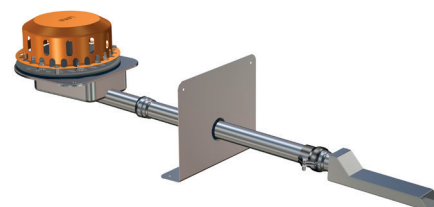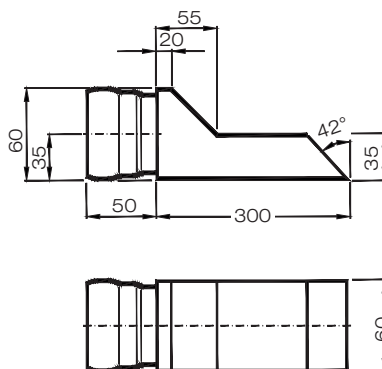

Series 88 (RB)

Drain Art.-No. 01391.040X

Weight: 3,9 kg

without upstand

for bituminous and plastic roofing sheets

