

## Specification sheet LX 2231


### Parapet drainage Rectangular spout with bonding flange

#### Emergency drainage

#### Gravity flow

#### Silent Power

|                   |                |
|-------------------|----------------|
| Discharge rate:   | 5,8 l/s        |
| Water height:     | 35 mm          |
| Roof penetration: | 0 mm           |
| Width/height:     | 500 mm/100 mm  |
| LX-Number:        | LX 2231        |
| Weir height:      | -              |
| Drain:            | ventilated     |
| Downpipe:         | -              |
| Downpipe height:  | -              |
| Drainage:         | into the open  |
| Flange:           | bonding flange |

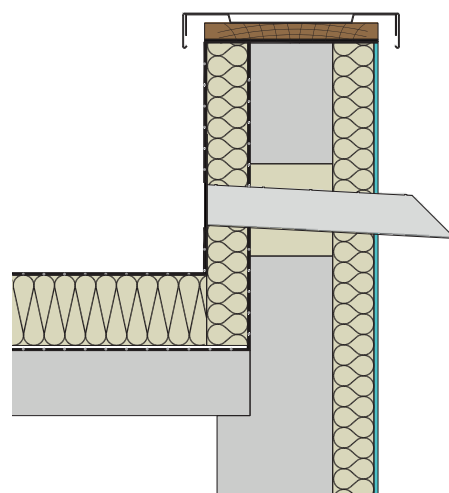


Note:

In this measurement, the 0-point in the discharge curve represents the lower edge of the pipe.

#### LX 2231 Piece list


1 x Art.-No. 19042.000X LORO-X Rectangular spout

#### hQ - Discharge curve

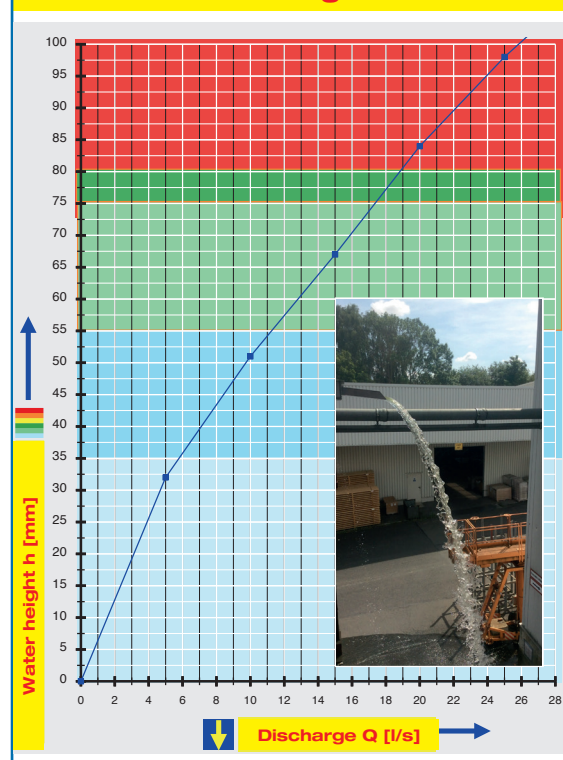

#### System power

#### CAD

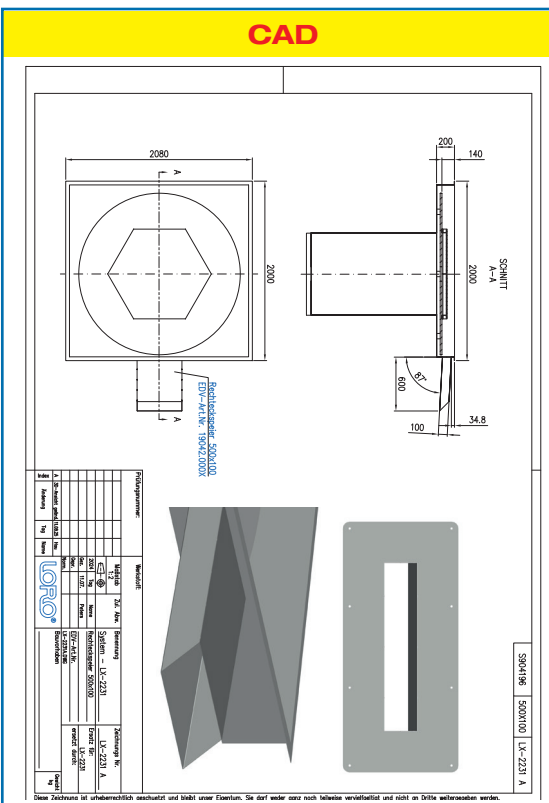

#### System shape



| Water height | mm  | 25 | 30 | 35  | 40  | 45  | 50  | 55   | 60   | 65   | 70   | 75   | 80   | 85   | 90   | 95   | 100  |
|--------------|-----|----|----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| Discharge    | l/s | -  | -  | 5,8 | 7,1 | 8,3 | 9,7 | 11,2 | 12,8 | 14,3 | 15,9 | 17,3 | 18,8 | 20,2 | 22,1 | 24,0 | 25,9 |
| Silent Power |     |    |    |     |     |     |     |      |      |      |      |      |      |      |      |      |      |

## LORO-X Rectangular spout with bonding flange

### LX2231-20X

#### Rectangular spout with bonding flange

Art.-No. 19042.000X  
Weight: 10,10 kg

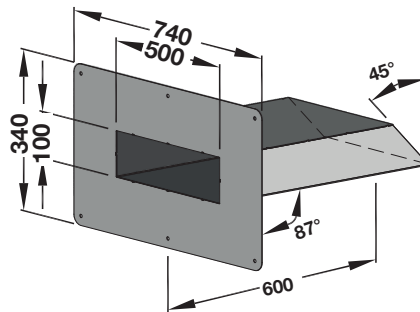

### LORO-X Facade cover

500 mm x 100 mm  
Art.-No. 19142.000X  
Weight: 1,9 kg



Object-related production upon request. Please contact LOROWERK for further information.

Maximum dimensions: b = 500 mm and h = 100 mm

Maximum dimensions: b = 750 mm and h = 150 mm with baffle.