

Specification sheet LX 460

Parapet roof drainage systems

Series 79/88 RAINSTAR®

Main drainage

Gravity flow

Silent Power

Discharge rate:	5,2 l/sec
Water height:	35 mm
Roof penetration:	92 mm
Diameter:	DN 70
LX-Number:	LX 460
Weir height:	0 mm
Drain:	ventilated
Downpipe:	not ventilated
Downpipe height:	4,2 m
Drainage:	in sewer
Flanschform:	Clamping flange


LX 460 Piece list

1 x Art.-No. choose drain on page two!


- 1 x Art.-No. 01301.070X, LORO-X pipe with one socket
- 1 x Art.-No. 00350.070X, LORO-X bend
- 1 x Art.-No. 01101.070X, LORO-X pipe with one socket
- 1 x Art.-No. 01201.070X, LORO-X pipe with one socket
- 1 x Art.-No. 05510.070X, LORO-X stand pipe

- 5 x Art.-No. 00911.070X, LORO-X sealing elements
- 3 x Art.-No. 00972.070X, LORO-X pipe clips
- 1 x Art.-No. 00986.000X, LORO-X lubricant
- 3 x Art.-No. 09603.120X, LORO-X hanger bolts
- 1 x Art.-No. 13235.070X, LORO-X sliding flange

hQ - Head-Discharge curve

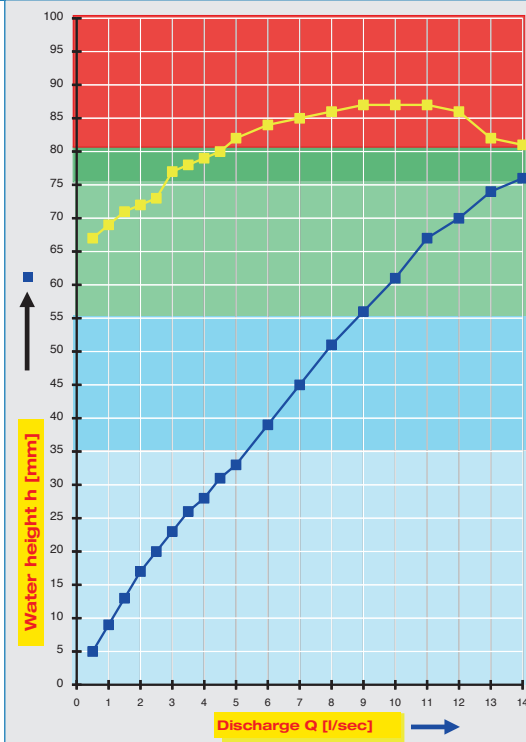

CAD

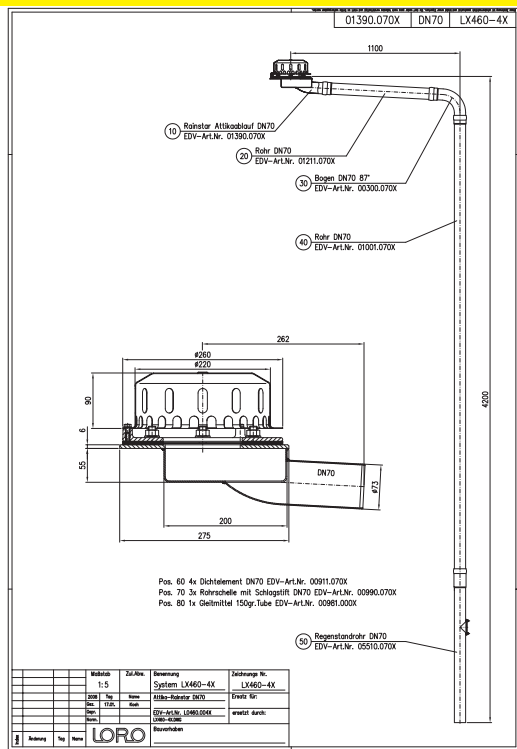

Systempower

Systemshape

Water height	mm	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/s	0,5	1,1	1,7	2,5	3,3	4,3	5,2	6,2	7,0	7,8	8,8	9,8	10,7	12,0	
		Silent			Silent Power						Power					

Bitte den entsprechenden Ablauf auswählen!

DN 70


LX460-1X

Series 79 (RA)

Drain Art.-No. 01372.070X

Weight: 6,3 kg

clamping flange 90°
for plastic roofing sheets

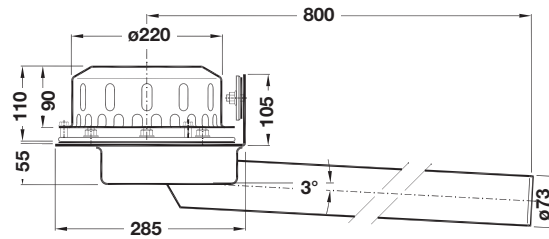


LX460-2X

Series 79 (RA)

Drain Art.-No. 01370.070X

Weight: 6,2 kg

clamping flange 45°
for bituminous roofing sheets


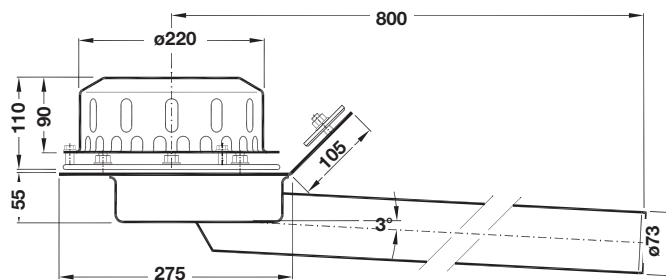


LX460-3X

Drain Art.-No. 01374.070X

Weight: 9,2 kg

Series 79 bonding flange 45°
for bituminous roofing sheets

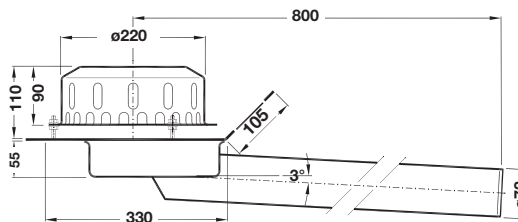


LX460-4X

Series 88

Drain Art.-No. 01390.070X

Weight: 3,9 kg

clamping flange without raised edge
for bituminous and plastic roofing sheets

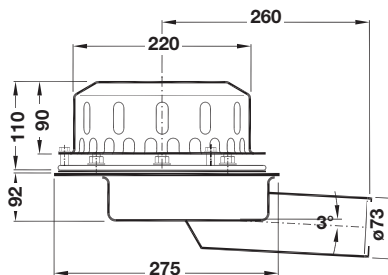

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.