

Specification sheet LX 694

Parapet drainage system Series 43 Parapet-Direct mit basin

Hauptentwässerung

Freispiegelströmung

Silent


Abfluss:	4,5 l/s
Wasserhöhe:	35 mm
Eingrifftiefe:	103 mm
Nennweite:	DN 100
LX-Nummer:	LX 694
Wehrhöhe:	0 mm
Haube:	belüftet
Falleitung:	belüftet
Falleitungshöhe:	4,2 m
Entwässerung:	in Grundleitung
Flanschform:	Klebeflansch 45°

LX 694 Piece list

1 x Art.-No. [01350.100X](#), Parapet direct drain
 1 x Art.-No. [01319.000X](#), LORO-X insulation block
 1 x Art.-No. [01301.100X](#), LORO-X Pipe with one socket
 1 x Art.-No. [13235.100X](#), LORO-Sliding flange
 1 x Art.-No. [00200.DD0X](#), LORO-X Branch
 1 x Art.-No. [13217.100X](#), LORO-X Ventilation piece
 1 x Art.-No. [01001.100X](#), LORO-X Pipe with one socket


1 x Art.-No. [05510.100X](#), LORO-X Standpipe
 5 x Art.-No. [00911.100X](#), LORO-X Dichtelemente
 3 x Art.-No. [00975.100X](#), LORO-X Sealing elements
 1 x Art.-No. [00986.000X](#), LORO-X Lubricant
 3 x Art.-No. [09604.100X](#), LORO-X Hanger bolts

hQ - Head Discharge curve

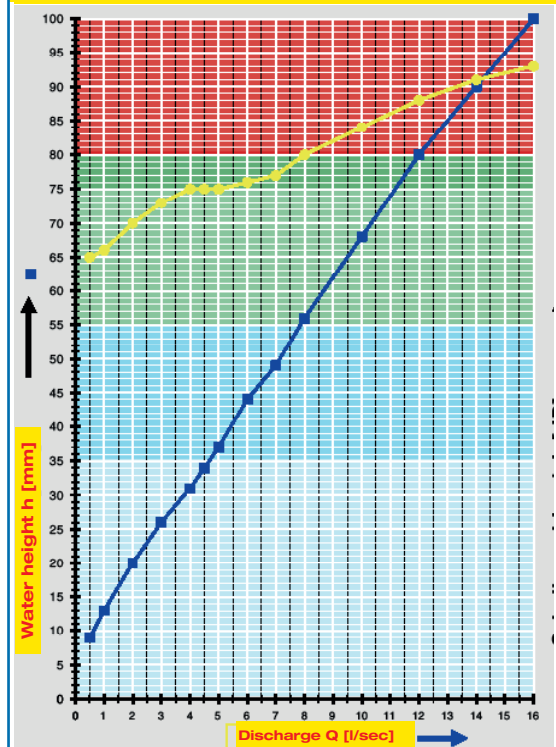

System power

CAD

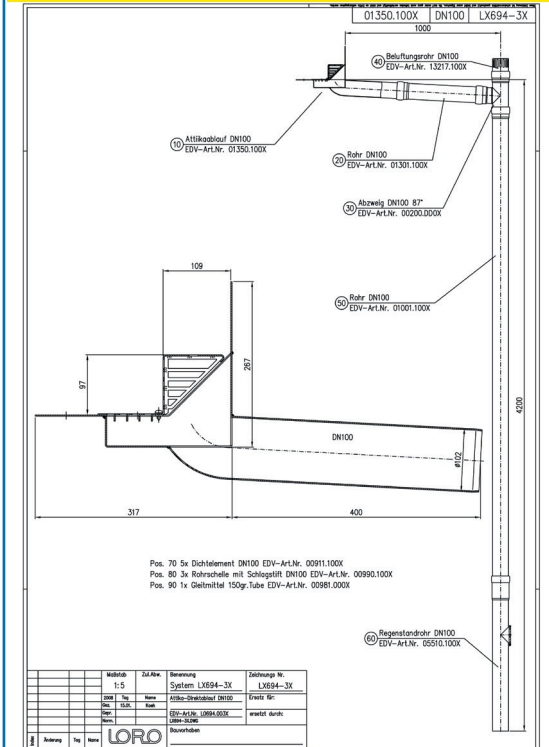

System shape

Water height	mm	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/s		0,6	1,2	2,0	2,7	3,7	4,5	5,5	6	7	8	8,2	9,5	10,2	11,1
Silent																

LORO-X Parapet-Direct, with basin

DN 100



LX694-3X

Series 43

Drain Art.-No. [01350.100X](#)

Weight: 8,0 kg

mit bonding flange
für bituminous roofing sheets

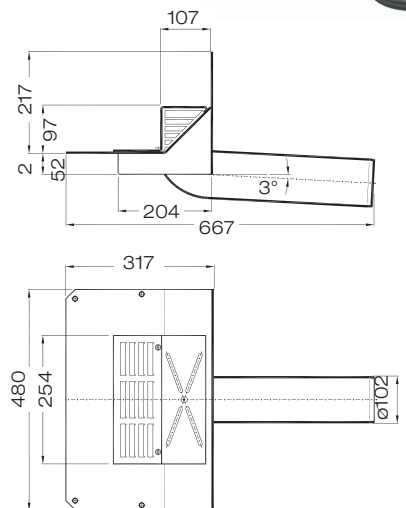
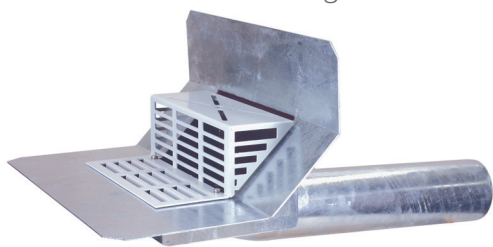


Sliding flange for LORO parapet direct drains

with pre-installed connection sleeve for vapor
barrier made of bituminous roofing sheets,
made of galvanized steel, including fastening screws

Art.-No. [13235.100X](#)

weight: 1,7 kg

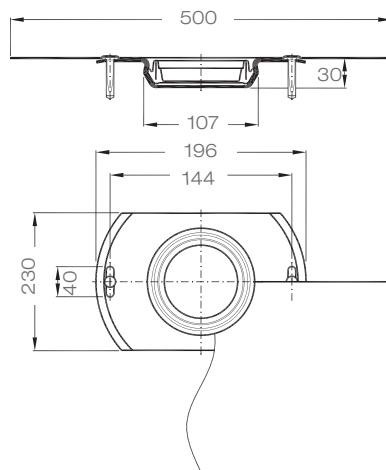

Trace heating: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be equipped with a trace heating.