


LORO-X overview LORO-DRAINJET® siphonic scupper drainage system

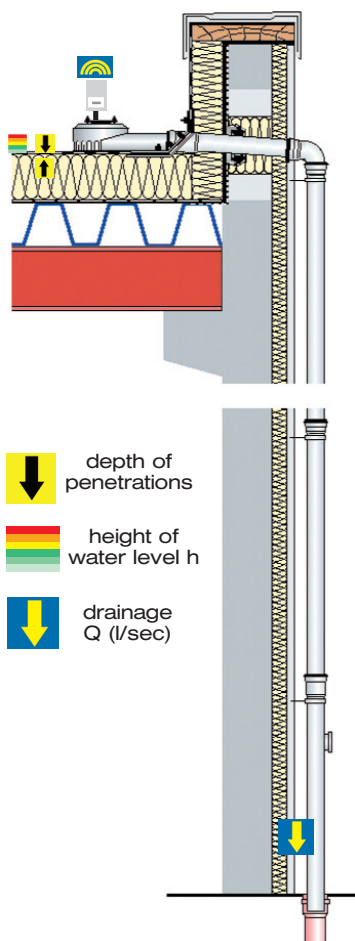

	main drainage		emergency drainage	
	siphonic drainage		siphonic drainage	
	power		power	
depth of penetration 	0 mm		0 mm	
nominal inner diameter	DN 50	DN 70	DN 50	DN 70
clamping flange 90°	LX-Nr: LX 789	LX-Nr: LX 636	LX-Nr: LX 790	LX-Nr: LX 637
clamping flange 45°	LX-Nr: LX 789	LX-Nr: LX 636	LX-Nr: LX 790	LX-Nr: LX 637
ahesive bonding flange 45°	LX-Nr: LX 789	LX-Nr: LX 636	LX-Nr: LX 790	LX-Nr: LX 637
weir height h 				
high > 60mm				
medium < 50mm				
low < 40mm	0 mm		40 mm	60 mm
height of water level h 				
high > 75mm			75 mm	75 mm
medium < 55mm	55 mm	55 mm		
low < 35mm				
drainage Q (l/s) 				
24 l/s				
20 l/s				
16 l/s				
12 l/s				
8 l/s	7.0 l/s	16.0 l/s	9.0 l/s	14.5 l/s
4 l/s				
silent power class 				
power	power	power	power	power
silent power				
silent				