

LORO-X PIPE WITH 2 SOCKET WITHOUT 50

INTERNAL COATING 2000 MM DN

LORO-X pipe 2 joints without internal coating 2000 mm DN 50

Beskrivning

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, for filling and ventilating pipes, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 2000 mm with 2sockets, DN50




Artikeldata

EAN-kod	4038088042915
ETIM-klass	EC011386
Nominell diameter	DN 50
Nominell längd/grad	2000
Yttermått (HxBxL)	63 x 63 x 2000 mm
Vikt	4,10 Kg (STK)
Produktgrupp	5
Tullnummer	73063012
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

LORO-X Rohre mit 2 Muffen aus Stahl, feuerverzinkt, ohne Innenbeschichtung. Alternativ können gemäß DIBt auch Formteile mit Innenbeschichtung verwendet werden.

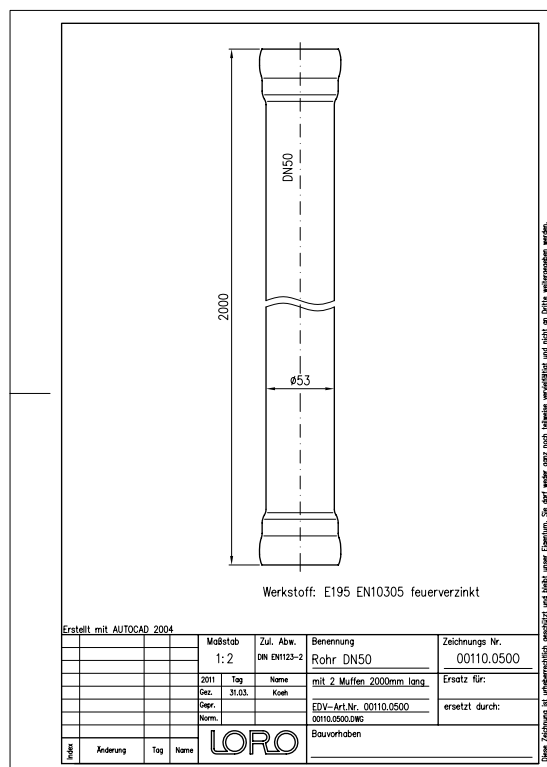

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Broschyr \(PDF\)](#)

[CAD \(DWG\)](#)