

## LORO-X PIPE WITH 2 SOCKET WITHOUT

## INTERNAL COATING 500 MM DN

**LORO-X pipe 2 joints without internal coating 500 mm DN 40**

## Beskrivning

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, for filling and ventilating pipes, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 500 mm with 2sockets, DN40




## Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088042823               |
| ETIM-klass          | EC011386                    |
| Nominell diameter   | DN 40                       |
| Nominell längd/grad | 500                         |
| Yttermått (HxBxL)   | 51 x 51 x 500 mm            |
| Vikt                | 0,70 Kg (STK)               |
| Produktgrupp        | 5                           |
| Tullnummer          | 73063012                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

## Användningsanvisning

LORO-X Rohre mit 2 Muffen aus Stahl, feuerverzinkt, ohne Innenbeschichtung. Alternativ können gemäß DIBt auch Formteile mit Innenbeschichtung verwendet werden.

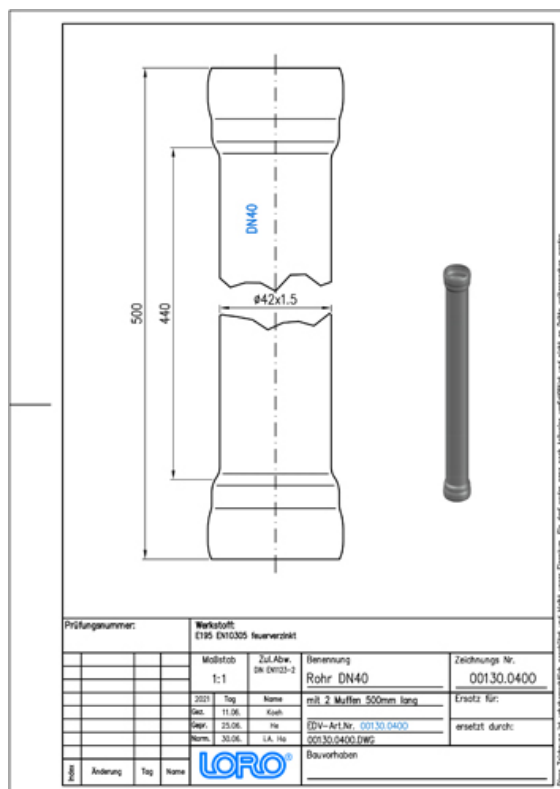

## Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

BIM 3D (STEP)

[Måttitning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Broschyr \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)