


LORO-X PIPE WITH 2 SOCKET WITHOUT

INTERNAL COATING 500 MM DN

LORO-X pipe 2 joints without internal coating 500 mm DN 40

Kuvaus

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, for filling and ventilating pipes, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 500 mm with 2sockets, DN40

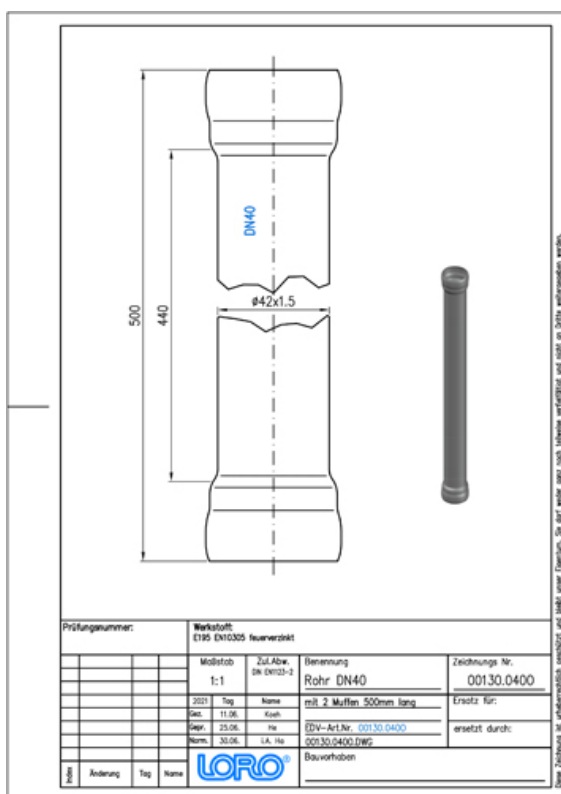

Tuotetiedot

EAN-koodi	4038088042823
ETIM-luokka	EC011386
Nimellishalkaisija	DN 40
Nimellispituus/-aste	500
Ulkomitat (KxLxS)	51 x 51 x 500 mm
Paino	0,70 Kg (STK)
Tuoteryhmä	5
Tullitariffin numero	73063012
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

LORO-X Rohre mit 2 Muffen aus Stahl, feuerverzinkt, ohne Innenbeschichtung. Alternativ können gemäß DIBt auch Formteile mit Innenbeschichtung verwendet werden.

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

Hvväksyntä (PDF)

BIM 3D (STEP)

[Mittapiirustus \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Esite \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)