


## LORO-X PIPE WITH 2 SOCKET WITHOUT 40

## INTERNAL COATING 500 MM DN

LORO-X pipe 2 joints without internal coating 500 mm DN 40

### Descripción

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, for filling and ventilating pipes, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 500 mm with 2sockets, DN40

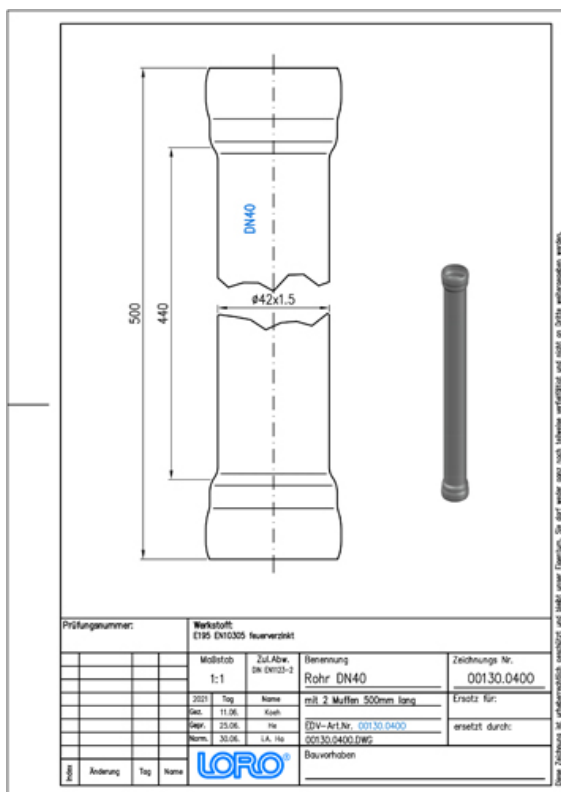

### Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088042823               |
| Clase ETIM                 | EC011386                    |
| Diámetro nominal           | DN 40                       |
| Longitud/grado nominal     | 500                         |
| Medidas exteriores (AxAxL) | 51 x 51 x 500 mm            |
| Peso                       | 0,70 Kg (STK)               |
| Grupo de productos         | 5                           |
| Número de arancel aduanero | 73063012                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

### Nota de uso

LORO-X Rohre mit 2 Muffen aus Stahl, feuerverzinkt, ohne Innenbeschichtung. Alternativ können gemäß DIBt auch Formteile mit Innenbeschichtung verwendet werden.

### Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

[Certificado \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dibujo dimensional \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Folleto \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)