

LORO-X PIPE WITH 2 SOCKET WITHOUT 50

INTERNAL COATING 500 MM DN

LORO-X pipe 2 joints without internal coating 500 mm DN 50

Kuvaus

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 500 mm with 2sockets, DN50




Tuotetiedot

EAN-koodi	4038088042830
ETIM-luokka	EC011386
Nimellishalkaisija	DN 50
Nimellispituus/-aste	500
Ulkomitat (KxLxS)	63 x 63 x 500 mm
Paino	1,00 Kg (STK)
Tuoteryhmä	5
Tullitariffin numero	73063012
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

LORO-X Rohre mit 2 Muffen aus Stahl, feuerverzinkt, ohne Innenbeschichtung. Alternativ können gemäß DIBt auch Formteile mit Innenbeschichtung verwendet werden.

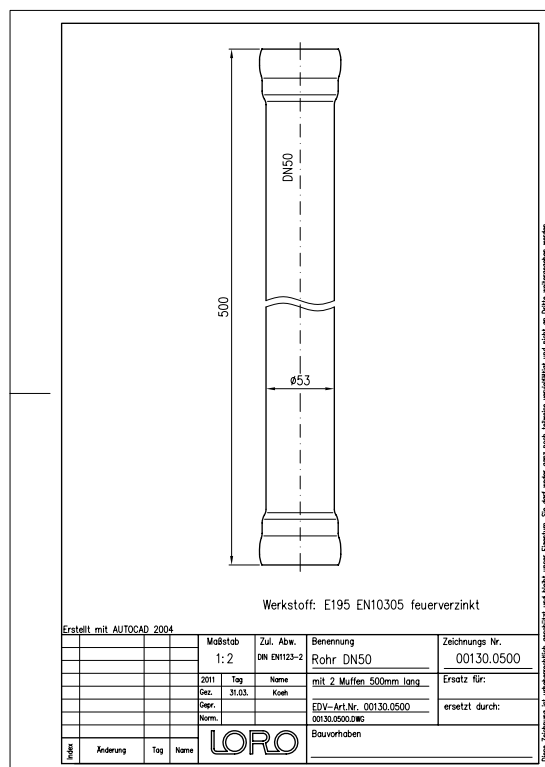

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Esite \(PDF\)](#)

[CAD \(DWG\)](#)