

LORO-X PIPE WITH 2 SOCKET WITHOUT 50

INTERNAL COATING 500 MM DN

LORO-X pipe 2 joints without internal coating 500 mm DN 50

Popis

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 500 mm with 2sockets, DN50




Údaje o artikli

EAN kód	4038088042830
ETIM trieda	EC011386
Menovitý priemer	DN 50
Menovitá dĺžka/stupeň	500
Vonkajšie rozmery (VxŠxH)	63 x 63 x 500 mm
Hmotnosť	1,00 Kg (STK)
Skupina produktov	5
Colný sadzobník	73063012
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

LORO-X Rohre mit 2 Muffen aus Stahl, feuerverzinkt, ohne Innenbeschichtung. Alternativ können gemäß DIBt auch Formteile mit Innenbeschichtung verwendet werden.

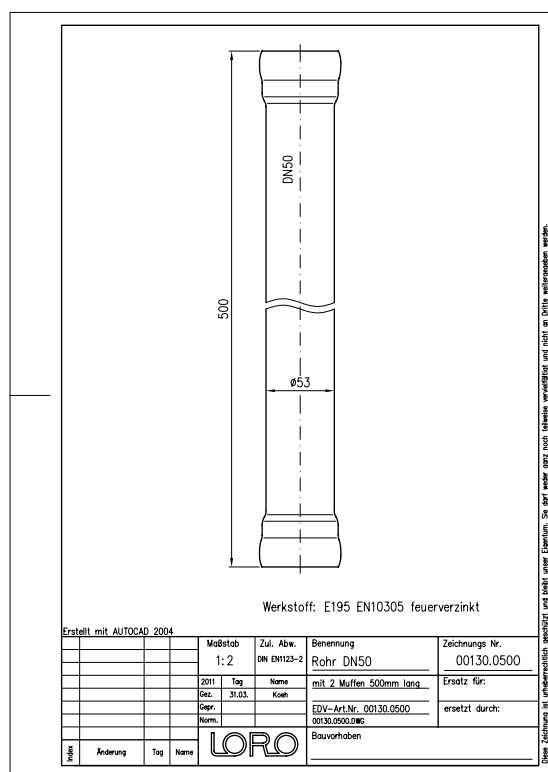

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)
[Certifikát \(PDF\)](#)
[BIM IFC4 \(parametrisch\)](#)

[Rozmerový výkres \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)
[CAD \(DWG\)](#)