LORO-X PIPE WITH 2 SOCKET 500 MM DN 50

LORO-X pipe 2 joints 500 mm DN 50

Description

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 500 mm with 2sockets, DN50

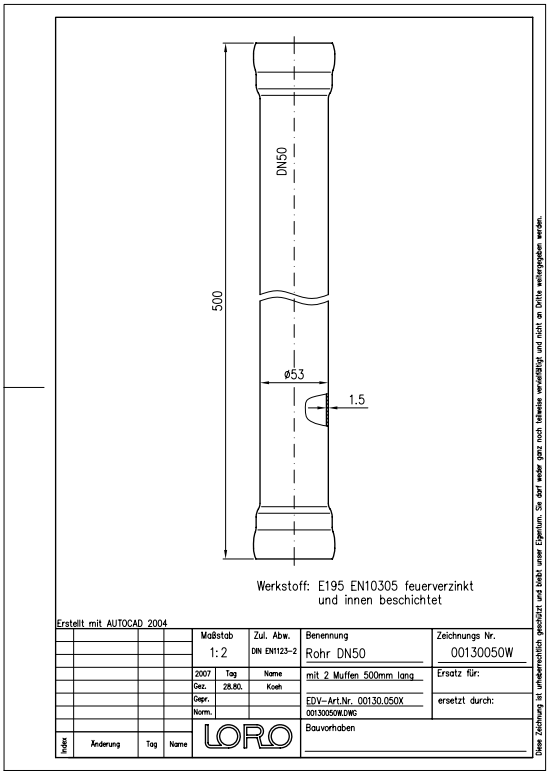

Données de l'article

Code EAN	**4038088006542**
Classe ETIM	**EC011386**
Diamètre nominal	**DN 50**
Longueur/degré nominal	**500**
Dimensions extérieures (HxLxP)	**63 x 63 x 500 mm**
Poids	**1,00 Kg (STK)**
Groupe de produits	**1**
Numéro tarifaire douanier	**73063012**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

LORO-X Stahlabflussrohre mit 2 Muffen werden hauptsächlich für die bauseitige Erstellung von Passstücken verwendet und eignen sich daher auch gut für Lagerhaltung.Wird das Rohr mit 2 Muffen an der benötigten Länge getrennt, so kann die andere Seite ebenfalls als Rohr mit 1 Muffe verwendet werden. Verschnitt wird so minimiert.

Téléchargements

Alles online

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)