

## LORO-X BRANCH 87 DEGREE DN 40/40

LORO-X branch 87 degrees DN 40/40

### Beskrivning

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN40




### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088013182               |
| ETIM-klass          | EC003025                    |
| Nominell diameter   | DN 40, DN 40                |
| Nominell längd/grad | 87                          |
| Yttermått (HxBxL)   | 51 x 51 x 140 mm            |
| Vikt                | 0,30 Kg (STK)               |
| Produktgrupp        | 1                           |
| Tullnummer          | 73089098                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

### Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

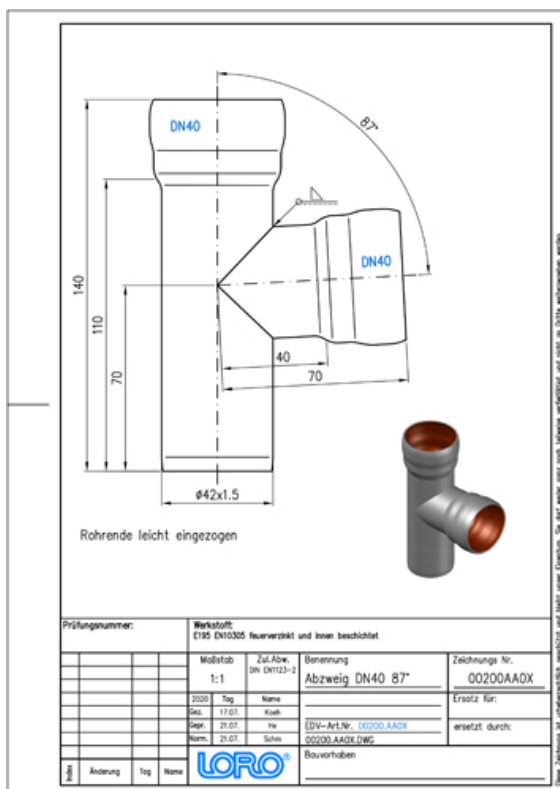

### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)