LORO-X BRANCH 87 DEGREE DN 50/50

LORO-X branch 87 degrees DN 50/50

Descriere

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN50

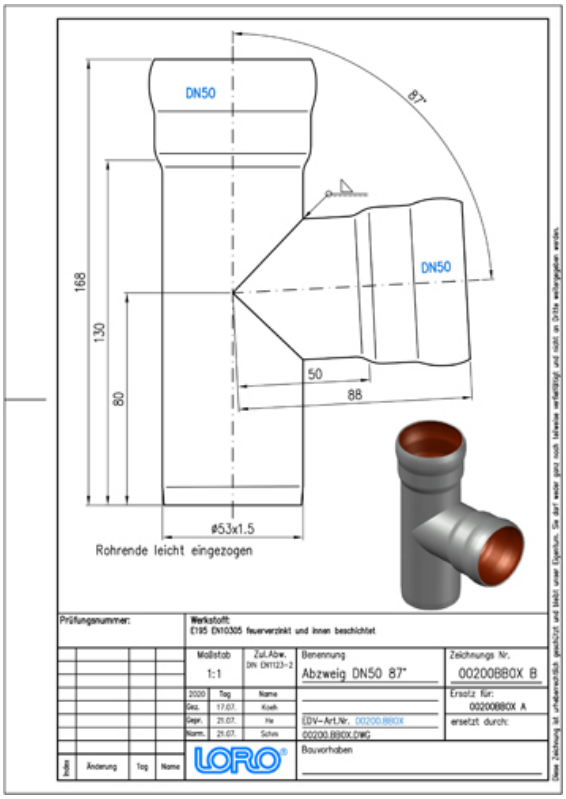

Date articol

Cod EAN	**4038088013205**
Clasă ETIM	**EC003025**
Diametru nominal	**DN 50, DN 50**
Lungime/grad nominal	**87**
Dimensiuni exterioare (ÎxLxA)	**63 x 63 x 168 mm**
Greutate	**0,50 Kg (STK)**
Grupă de produse	**1**
Număr tarif vamal	**73089098**
Material / Culoare	**Stahl feuerverzinkt, Silber**

Notă de utilizare

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Descărcări

Alles online

[Instrucțiuni de montaj (PDF)](#)
[Desen CAD (PDF)](#)
[Broșură (PDF)](#)
[Certificat (PDF)](#)
[CAD 2D (DXF)](#)
[CAD 3D (DWG)](#)
[BIM 3D (STEP)](#)
[BIM IFC4 (parametrisch)](#)
[BIM 3D (IFC)](#)
[BIM Revit (RFA)](#)