


LORO COPPER BRANCH 87 DEGREE DN 70/70

LORO-X branch copper 87 degrees DN 70/70

Kuvaus

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 87 degrees, DN70

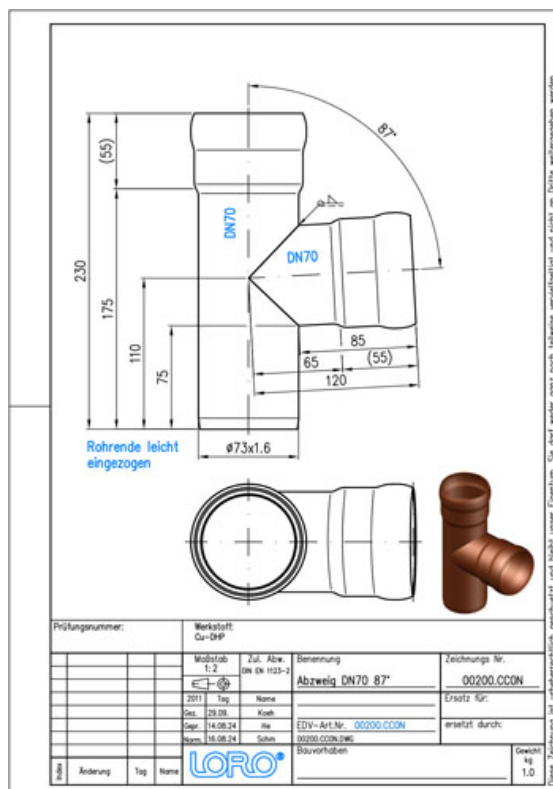

Tuotetiedot

EAN-koodi	4038088034453
ETIM-luokka	EC003025
Nimellishalkaisija	DN 70, DN 70
Nimellispituus/-aste	87
Ulkomitat (KxLxS)	84 x 164 x 230 mm
Paino	1,00 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	74121000
Materiaali / Väri	Kupfer, Kupfer

Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Mittapiirustus \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Esite \(PDF\)](#)

BIM 3D (STEP)