

LORO-X BRANCH 87 DEGREE DN 70/70

LORO-X branch 87 degrees DN 70/70

Kuvaus

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70




Tuotetiedot

EAN-koodi	4038088013229
ETIM-luokka	EC003025
Nimellishalkaisija	DN 70, DN 70
Nimellispituus/-aste	87
Ulkomitat (KxLxS)	84 x 84 x 230 mm
Paino	1,00 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

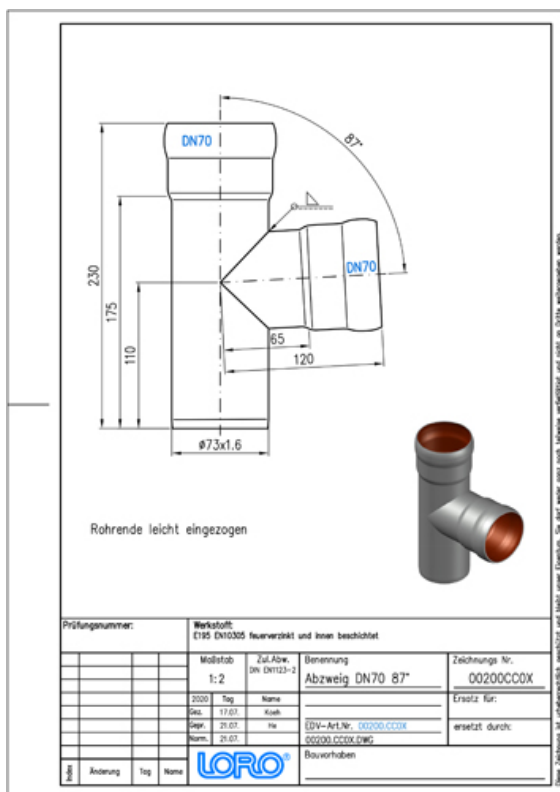

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)