


## LORO-X BRANCH 87 DEGREE DN 70/70

LORO-X branch 87 degrees DN 70/70

### Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70

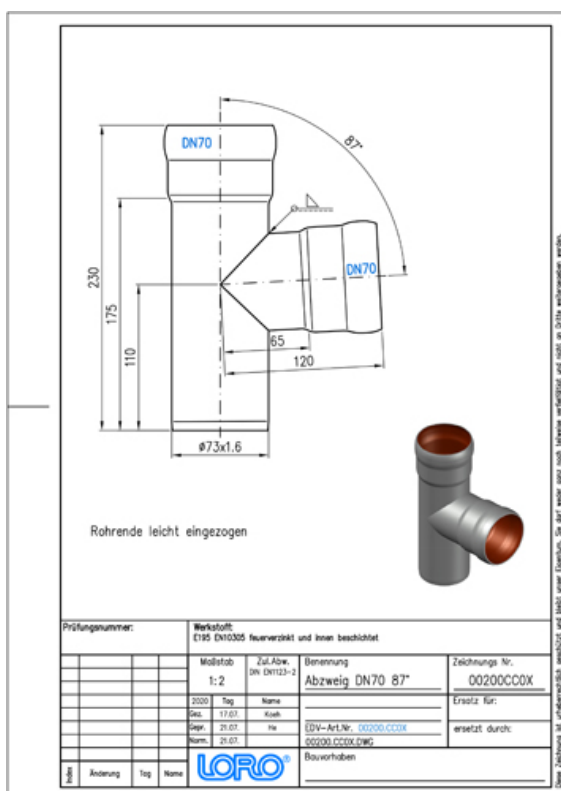

### Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088013229               |
| Klasa ETIM                 | EC003025                    |
| Średnica nominalna         | DN 70, DN 70                |
| Długość/stożek nominalny   | 87                          |
| Wymiary zewnętrzne (WxSxD) | 84 x 84 x 230 mm            |
| Waga                       | 1,00 Kg (STK)               |
| Grupa produktów            | 1                           |
| Numer taryfy celnej        | 73089098                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

### Wskazówki dotyczące użytkowania

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

### Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametryczny\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)