


LORO COPPER BRANCH 87 DEGREE DN 100/100

LORO-X branch copper 87 degrees DN 100/100

Beskrivelse

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 87 degrees, DN100

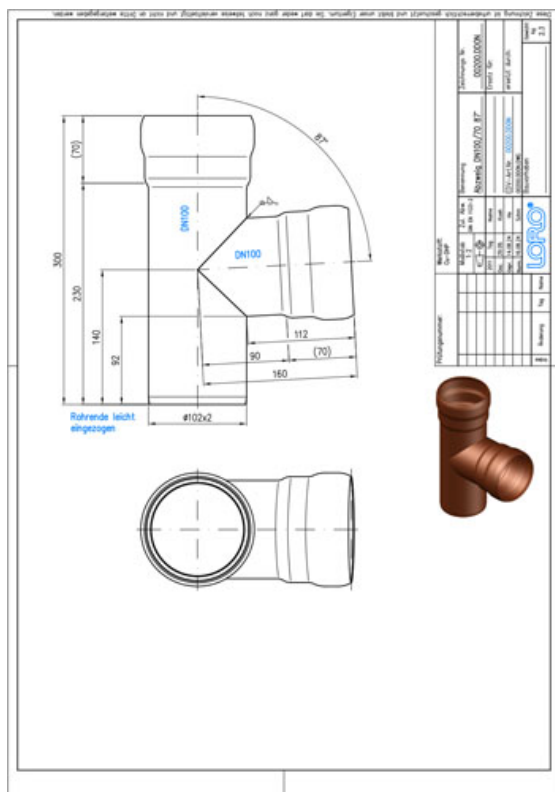

Artikkeldata

EAN-kode **4038088034477**

ETIM-klasse **EC003025**

Nominell diameter **DN 100, DN 100**

Nominell
lengde/grad **87**

Utvendige mål
(HxBxL) **118 x 222 x 300 mm**

Vekt **2,30 Kg (STK)**

Produktgruppe **1**

Tolltariffnummer **74121000**

Materiale / Farge **Kupfer, Kupfer**

Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Måltegning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brosjyre \(PDF\)](#)

[BIM 3D \(STEP\)](#)