
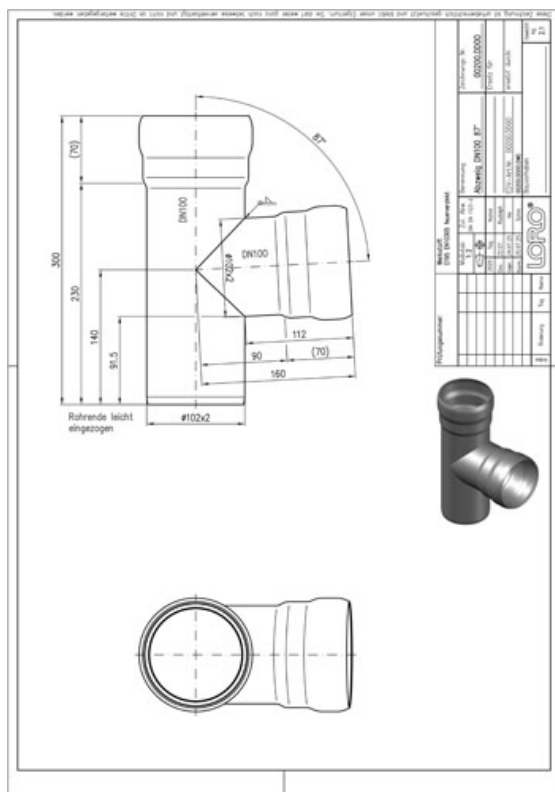


LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without inside coating 87 degrees DN 100/100

Description

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

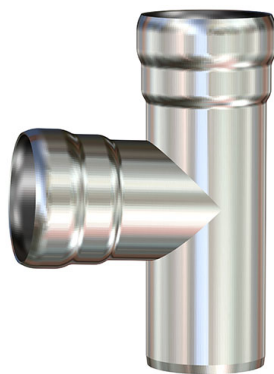

Article information

EAN Code	4038088109847
ETIM Class	EC003025
Nominal diameter	DN 100, DN 100
Nominal length/degree	87
Outside measurements (HxWxL)	222 x 118 x 300 mm
Weight	2,10 Kg (STK)
Product group	1
Customs tariff number	73063012
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

BIM 3D (STEP)

[CAD drawing \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)