


LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without inside coating 87 degrees DN 100/100

Beskrivningstext

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

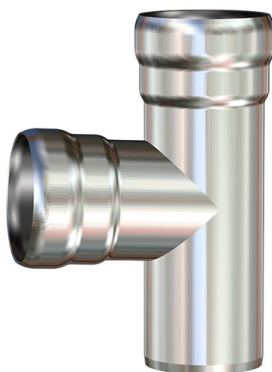


Artikeldata

EAN-kod	4038088109847
ETIM-klass	EC003025
Nominell diameter	DN 100, DN 100
Nominell längd/grad	87
Yttermått (HxBxL)	222 x 118 x 300 mm
Vikt	2,10 Kg (STK)
Produktgrupp	1
Tullnummer	73063012
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

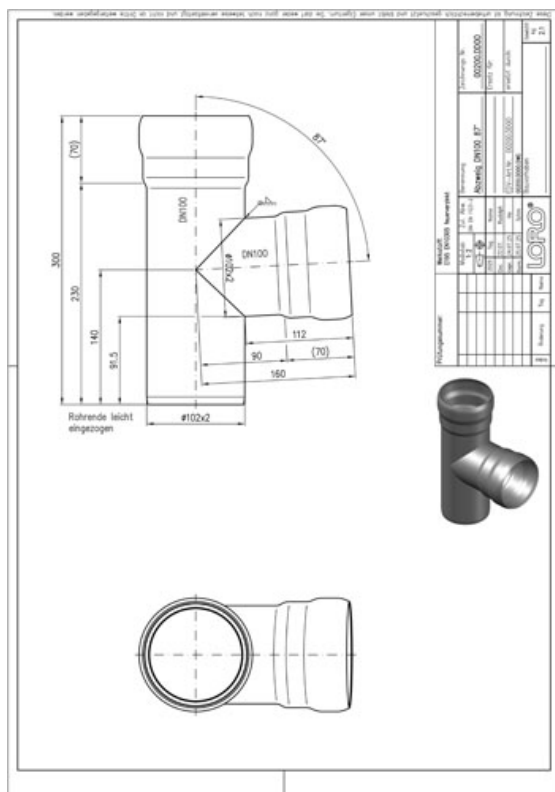

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)