LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without insinde coating 87 degrees DN 100/100

Besedilo za popis del

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

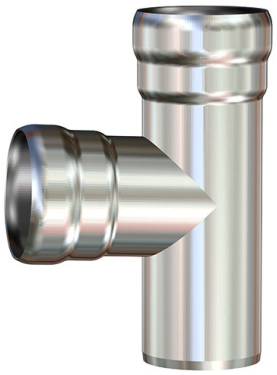

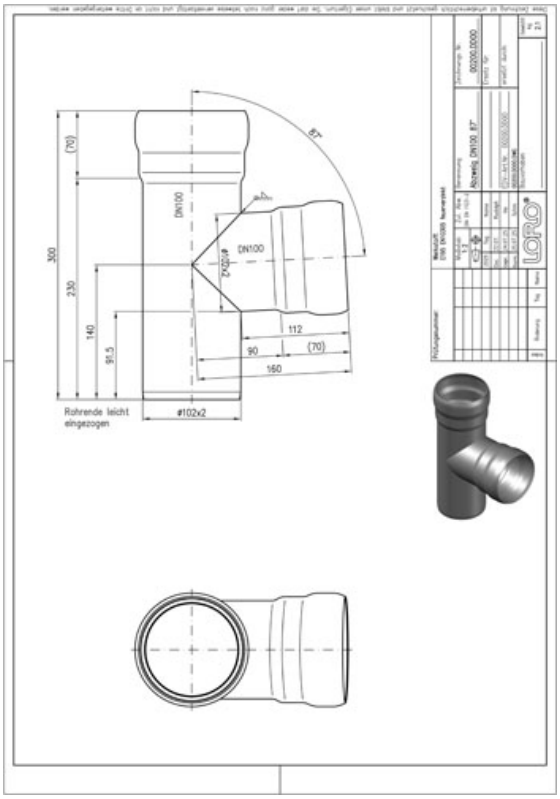

Podatki o izdelku

EAN koda	**4038088109847**
ETIM razred	**EC003025**
Nazivni premer	**DN 100, DN 100**
Nazivna dolžina/stopinja	**87**
Zunanje mere (VxŠxD)	**222 x 118 x 300 mm**
Teža	**2,10 Kg (STK)**
Skupina izdelkov	**1**
Carinska tarifna številka	**73063012**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Prenosi

Alles online

Navodila za vgradnjo (PDF)
Certifikat (PDF)
BIM 3D (STEP)
Merska risba (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)