LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without insinde coating 87 degrees DN 100/100

Text pre výberové konanie

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

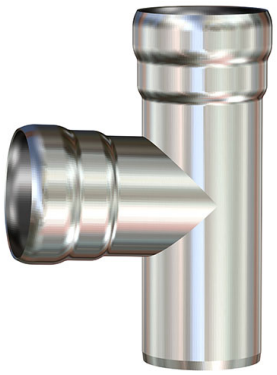

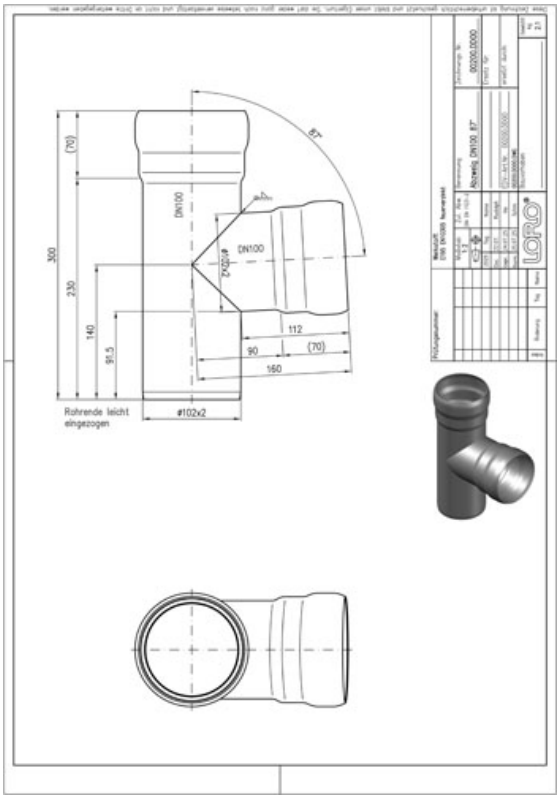

Údaje o artikli

EAN kód	4038088109847
ETIM trieda	EC003025
Menovitý priemer	DN 100, DN 100
Menovitá dĺžka/stupeň	87
Vonkajšie rozmery (VxŠxH)	222 x 118 x 300 mm
Hmotnosť	2,10 Kg (STK)
Skupina produktov	1
Colný sadzobník	73063012
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Na stiahnutie

Alles online

Návod na montáž (PDF)
Certifikát (PDF)
BIM 3D (STEP)
Rozmerový výkres (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)