
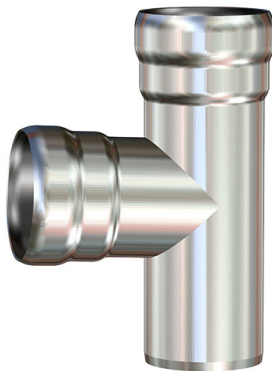


LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without inside coating 87 degrees DN 100/100

Bestektekst

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

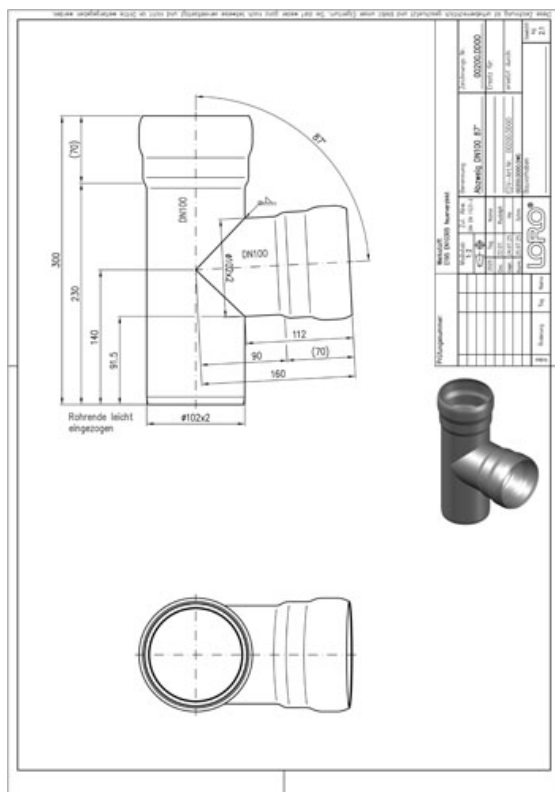

Artikelgegevens

EAN-code	4038088109847
ETIM Klasse	EC003025
Nominale diameter	DN 100, DN 100
Nominale lengte/graad	87
Buitenafmetingen (HxBxL)	222 x 118 x 300 mm
Gewicht	2,10 Kg (STK)
Productgroep	1
Douanetariefnumme	73063012
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)