LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without insinde coating 87 degrees DN 100/100

Tekst przetargowy

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

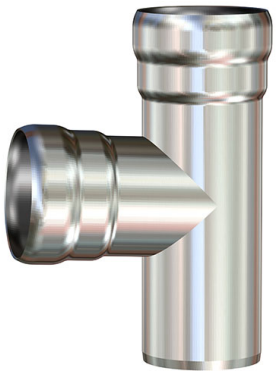

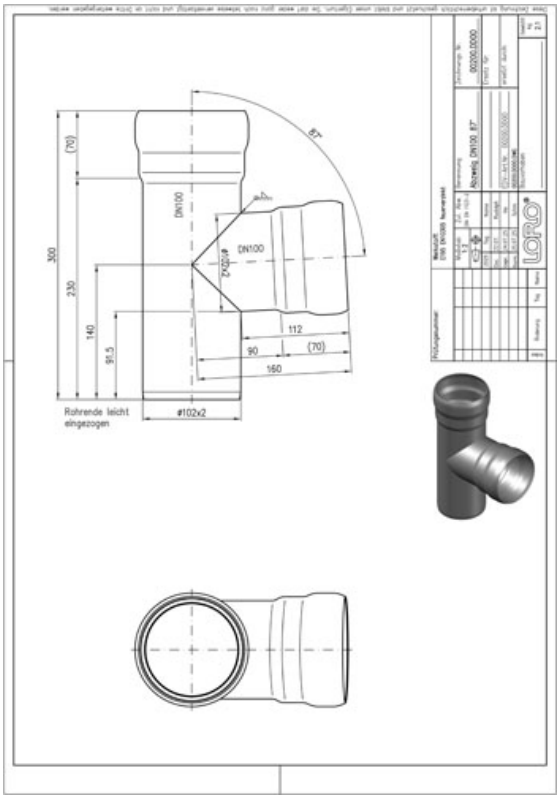

Dane artykułu

Kod EAN	4038088109847
Klasa ETIM	EC003025
Średnica nominalna	DN 100, DN 100
Długość/stopień nominalny	87
Wymiary zewnętrzne (WxSxD)	222 x 118 x 300 mm
Waga	2,10 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73063012
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Pobieranie

Alles online

Instrukcja montażu (PDF)
Certyfikat (PDF)
BIM 3D (STEP)
Rysunek wymiarowy (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Broszura (PDF)
CAD 3D (DWG)
BIM 3D (IFC)