LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without insinde coating 87 degrees DN 100/100

Voce di capitolato

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

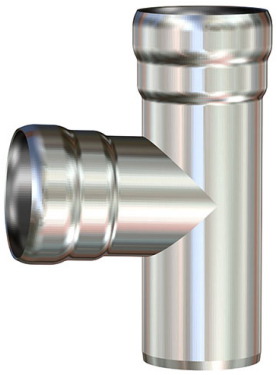

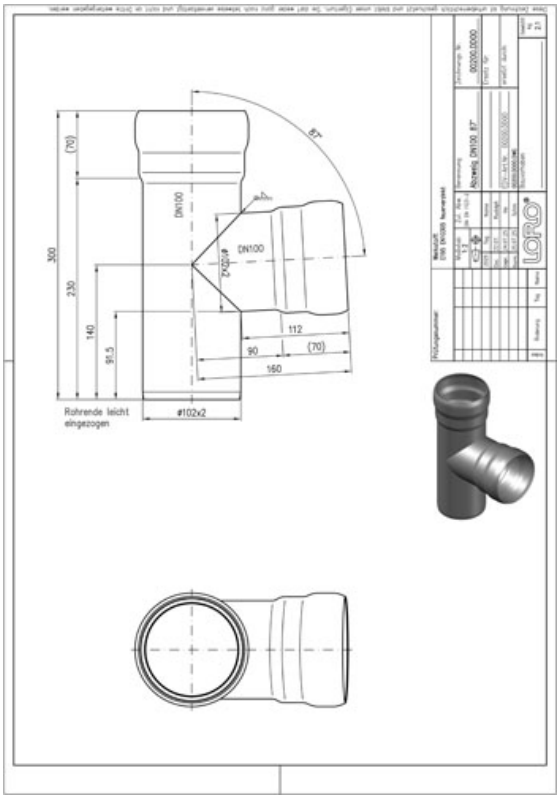

Dati articolo

Codice EAN	**4038088109847**
Classe ETIM	**EC003025**
Diametro nominale	**DN 100, DN 100**
Lunghezza/grado nominale	**87**
Misure esterne (AxLxP)	**222 x 118 x 300 mm**
Peso	**2,10 Kg (STK)**
Gruppo prodotti	**1**
Numero tariffa doganale	**73063012**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
BIM 3D (STEP)
Disegno dimensionale (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Brochure (PDF)
CAD 3D (DWG)
BIM 3D (IFC)