
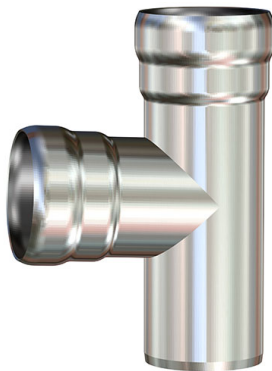


LX-ABZWEIG O. IB. 87GRAD DN100/100

LORO-X branch without inside coating 87 degrees DN 100/100

Beskrivelsestekst

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 87 degrees, DN100

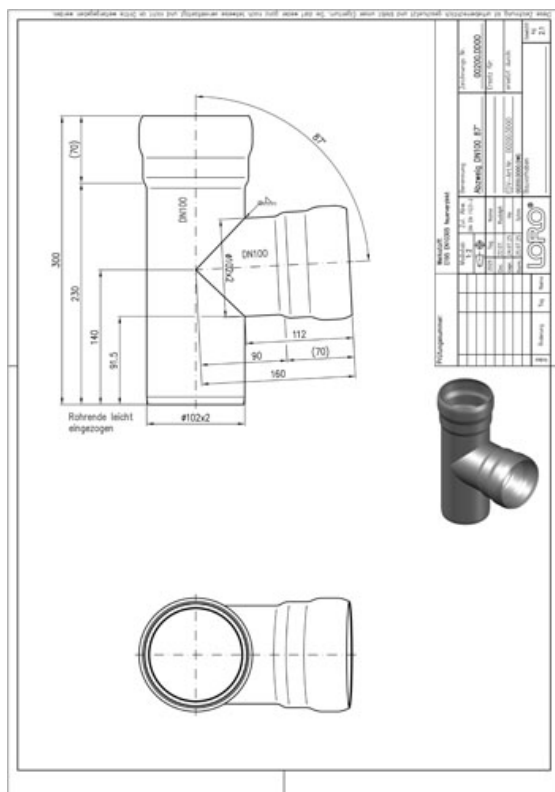

Artikkeldata

EAN-kode	4038088109847
ETIM-klasse	EC003025
Nominell diameter	DN 100, DN 100
Nominell lengde/grad	87
Utvendige mål (HxBxL)	222 x 118 x 300 mm
Vekt	2,10 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkjenning \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Brosjyre \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)