LORO-X BRANCH 87 DEGREE DN 125/125

LORO-X branch 87 degrees DN 125/125

Beskrivning

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN125

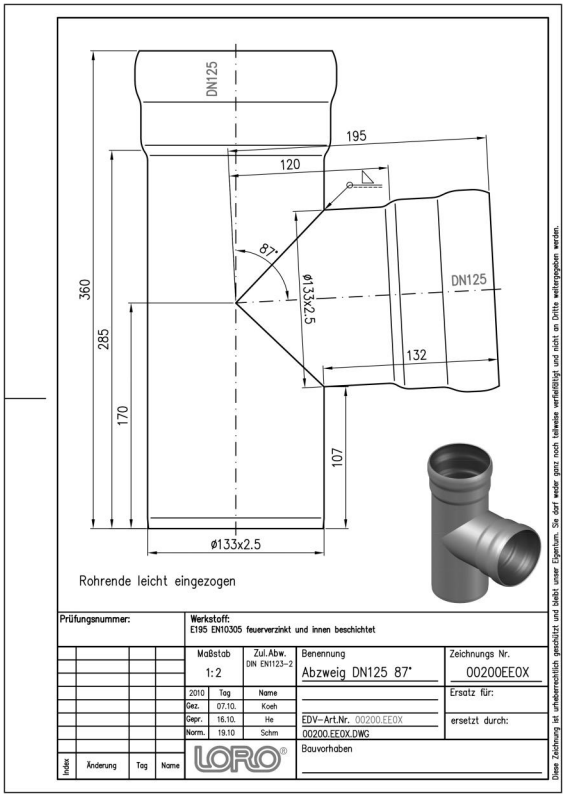

Artikeldata

EAN-kod	**4038088013243**
ETIM-klass	**EC003025**
Nominell diameter	**DN 125, DN 125**
Nominell längd/grad	**87**
Yttermått (HxBxL)	**152 x 152 x 360 mm**
Vikt	**4,50 Kg (STK)**
Produktgrupp	**1**
Tullnummer	**73089098**
Material / Färg	**Stahl feuerverzinkt, Silber**

Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Nedladdningar

Alles online

- Monteringsanvisning (PDF)
- Godkännande (PDF)
- BIM 3D (STEP)
- BIM Revit (RFA)
- Måttritning (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Broschyr (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)