

LORO-X BRANCH 87 DEGREE DN 125/125

LORO-X branch 87 degrees DN 125/125

Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN125




Artikeldata

EAN-kode	4038088013243
ETIM Klasse	EC003025
Nominel diameter	DN 125, DN 125
Nominel længde/grad	87
Ydermål (HxBxL)	152 x 152 x 360 mm
Vægt	4,50 Kg (STK)
Produktgruppe	1
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

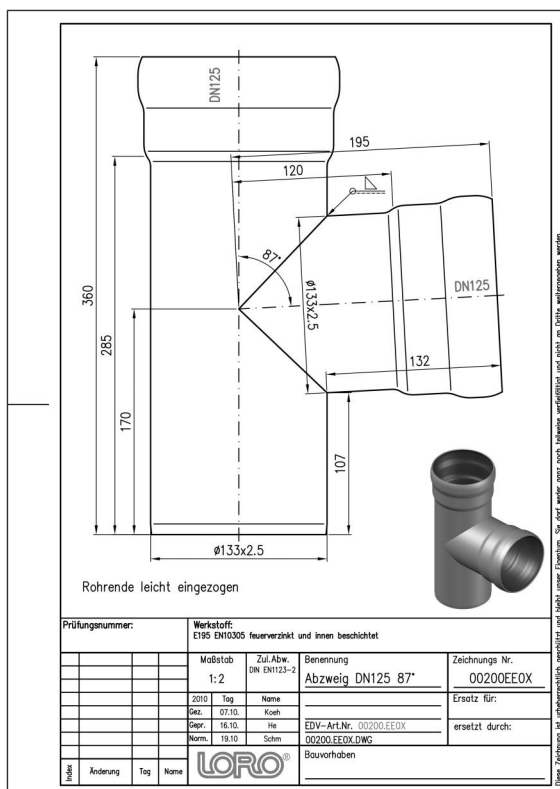

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)
[Certifikat \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)