


LORO-X BRANCH 87 DEGREE DN 125/125

LORO-X branch 87 degrees DN 125/125

Descripción

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN125

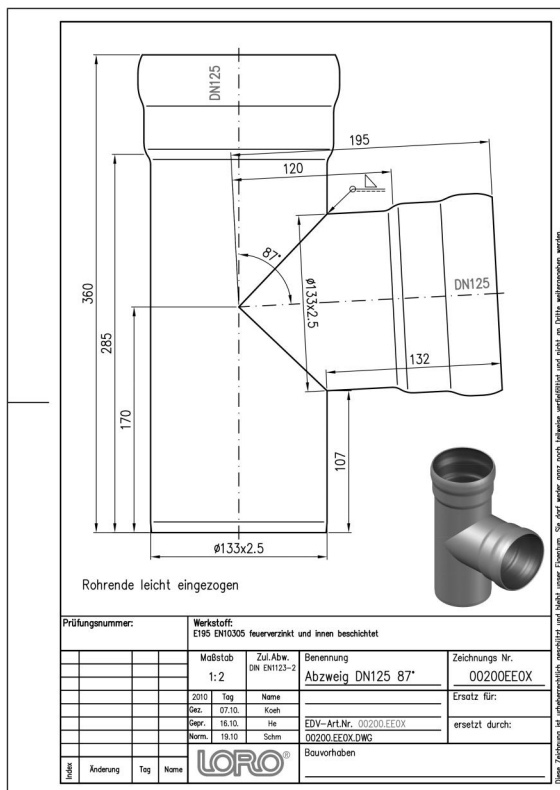

Datos del artículo

Código EAN	4038088013243
Clase ETIM	EC003025
Diámetro nominal	DN 125, DN 125
Longitud/grado nominal	87
Medidas exteriores (AxAxL)	152 x 152 x 360 mm
Peso	4,50 Kg (STK)
Grupo de productos	1
Número de arancel aduanero	73089098
Material / Color	Stahl feuerverzinkt, Silber

Nota de uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)
[Certificado \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)

[Dibujo dimensional \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(paramétrisch\)](#)

[Folleto \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)