


## LORO-X BRANCH 87 DEGREE DN 150/150

LORO-X branch 87 degrees DN 150/150

### Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN150

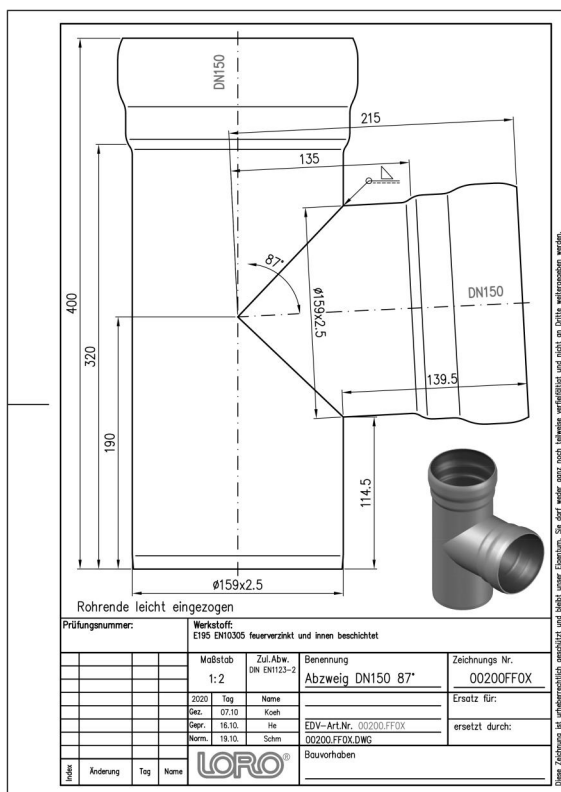

### Podatki o izdelku

|                           |                             |
|---------------------------|-----------------------------|
| EAN koda                  | 4038088013250               |
| ETIM razred               | EC003025                    |
| Nazivni premer            | DN 150, DN 150              |
| Nazivna dolžina/stopinja  | 87                          |
| Zunanje mere (VxŠxD)      | 181 x 181 x 400 mm          |
| Teža                      | 6,00 Kg (STK)               |
| Skupina izdelkov          | 1                           |
| Carinska tarifna številka | 73089098                    |
| Material / Barva          | Stahl feuerverzinkt, Silber |

### Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

### Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Merska risba \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)