


LORO-X BRANCH 87 DEGREE DN 150/150

LORO-X branch 87 degrees DN 150/150

Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN150

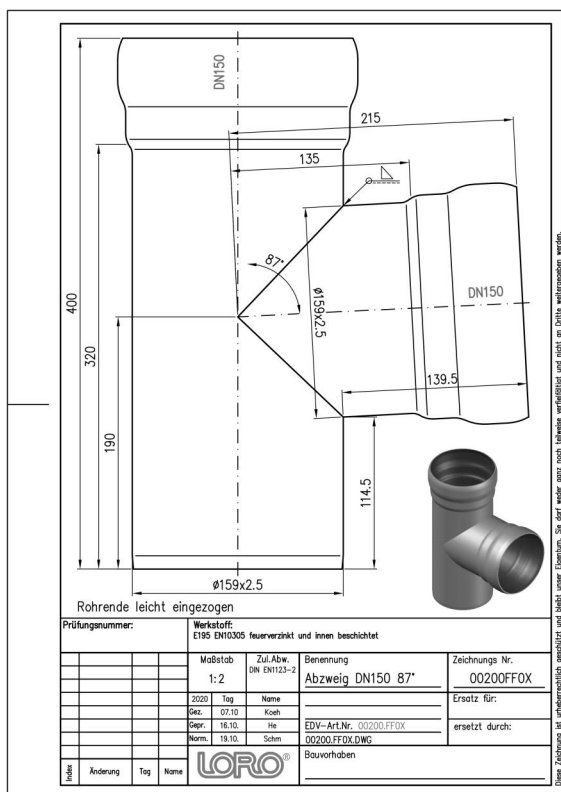

Podaci o artiklu

EAN kod	4038088013250
ETIM klasa	EC003025
Nazivni promjer	DN 150, DN 150
Nazivna duljina/stupanj	87
Vanjske mjere (VxŠxD)	181 x 181 x 400 mm
Težina	6,00 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)