

## LORO-X BRANCH 87 DEGREE DN 150/150

LORO-X branch 87 degrees DN 150/150

### Descripción

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN150




### Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088013250               |
| Clase ETIM                 | EC003025                    |
| Diámetro nominal           | DN 150, DN 150              |
| Longitud/grado nominal     | 87                          |
| Medidas exteriores (AxAxL) | 181 x 181 x 400 mm          |
| Peso                       | 6,00 Kg (STK)               |
| Grupo de productos         | 1                           |
| Número de arancel aduanero | 73089098                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

### Nota de uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

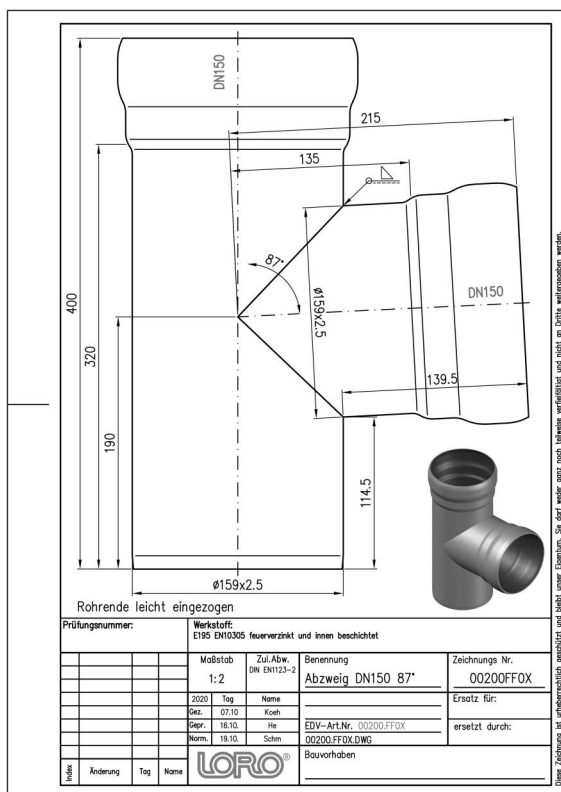

### Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

[Certificado \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Dibujo dimensional \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(paramétrisch\)](#)

[Folleto \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)