


## LORO-X BRANCH 87 DEGREE DN 200/200

**LORO-X branch 87 degrees DN 200/200**

## Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN200

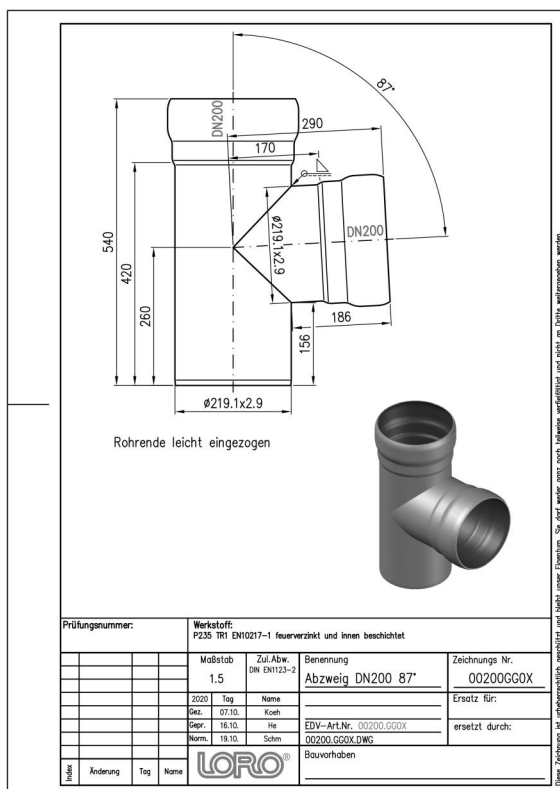

## Artikkeldata

|                          |                             |
|--------------------------|-----------------------------|
| EAN-kode                 | 4038088013267               |
| ETIM-klasse              | EC003025                    |
| Nominell diameter        | DN 200, DN 200              |
| Nominell<br>lengde/grad  | 87                          |
| Utvendige mål<br>(HxBxL) | 247 x 247 x 540 mm          |
| Vekt                     | 10,90 Kg (STK)              |
| Produktgruppe            | 1                           |
| Tolltariffnummer         | 73089098                    |
| Materiale / Farge        | Stahl feuerverzinkt, Silber |

## Bruksanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

**Nedlastinger**



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

### BIM 3D (STEP)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brosjyre \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)