

## LORO-X BRANCH 87 DEGREE DN 80/80

LORO-X branch 87 degrees DN 80/80

### Beskrivning

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80




### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088013304               |
| ETIM-klass          | EC003025                    |
| Nominell diameter   | DN 80, DN 80                |
| Nominell längd/grad | 87                          |
| Yttermått (HxBxL)   | 1022 x 191 x 265 mm         |
| Vikt                | 1,40 Kg (STK)               |
| Produktgrupp        | 1                           |
| Tullnummer          | 73089098                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

### Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

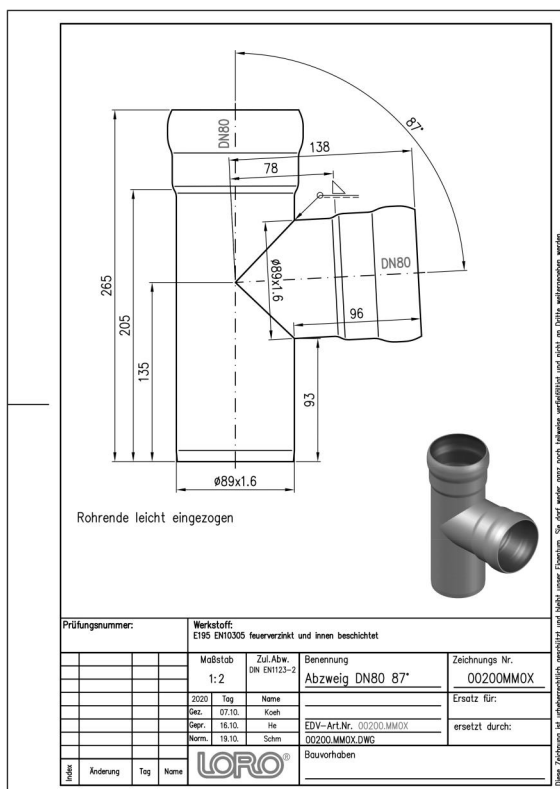

### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)