

## LORO-X BRANCH 87 DEGREE DN 80/80

### LORO-X branch 87 degrees DN 80/80

#### Kuvaus

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80




#### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088013304               |
| ETIM-luokka          | EC003025                    |
| Nimellishalkaisija   | DN 80, DN 80                |
| Nimellispituus/-aste | 87                          |
| Ulkomitat (KxLxS)    | 1022 x 191 x 265 mm         |
| Paino                | 1,40 Kg (STK)               |
| Tuoteryhmä           | 1                           |
| Tullitariffin numero | 73089098                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

#### Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

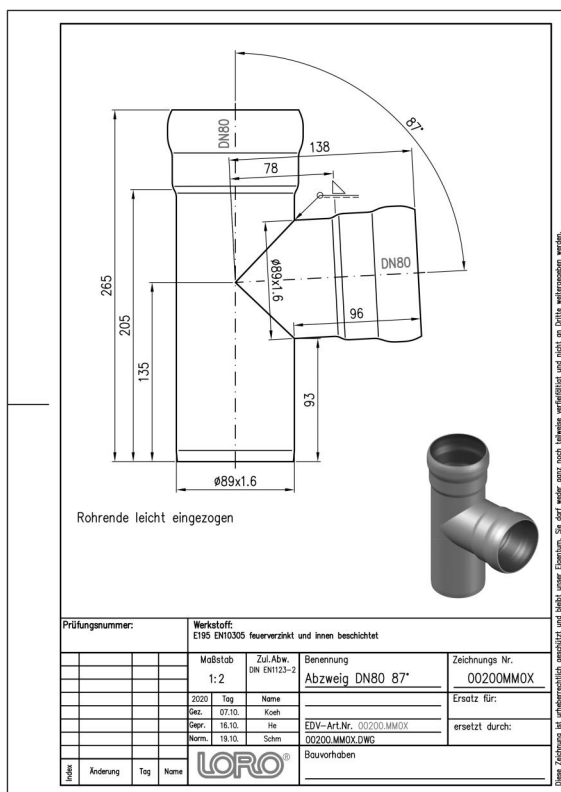

#### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)