LORO-X BRANCH 87 DEGREE DN 80/80

LORO-X branch 87 degrees DN 80/80

Descripción

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80

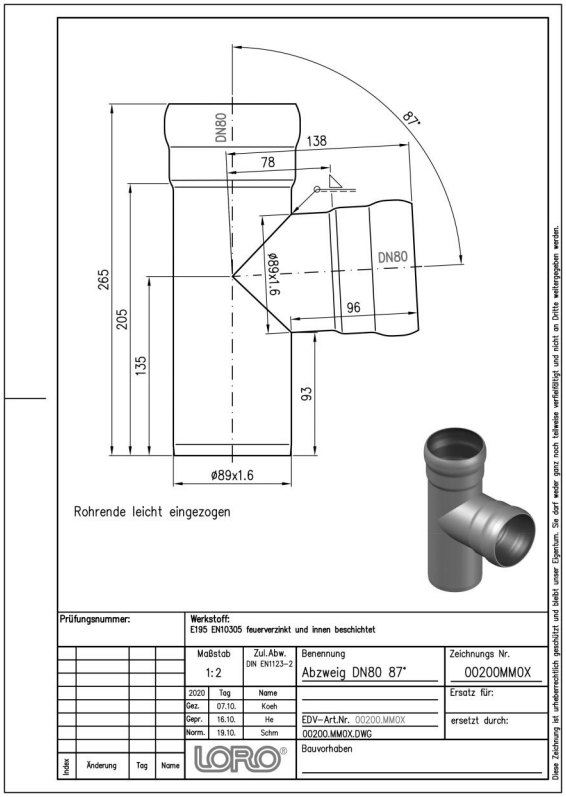

Datos del artículo

Código EAN	**4038088013304**
Clase ETIM	**EC003025**
Diámetro nominal	**DN 80, DN 80**
Longitud/grado nominal	**87**
Medidas exteriores (AxAxL)	**1022 x 191 x 265 mm**
Peso	**1,40 Kg (STK)**
Grupo de productos	**1**
Número de arancel aduanero	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Descargas

Alles online

[Instrucciones de instalación (PDF)](#) [Dibujo dimensional (PDF)](#) [Folleto (PDF)](#)
[Certificado (PDF)](#) [CAD 2D (DXF)](#) [CAD 3D (DWG)](#)
[BIM 3D (STEP)](#) [BIM IFC4 (parametrisch)](#) [BIM 3D (IFC)](#)