


LORO-X BRANCH 70 DEGREE DN 40/40

LORO-X branch 70 degrees DN 40/40

Beschrijving

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN40

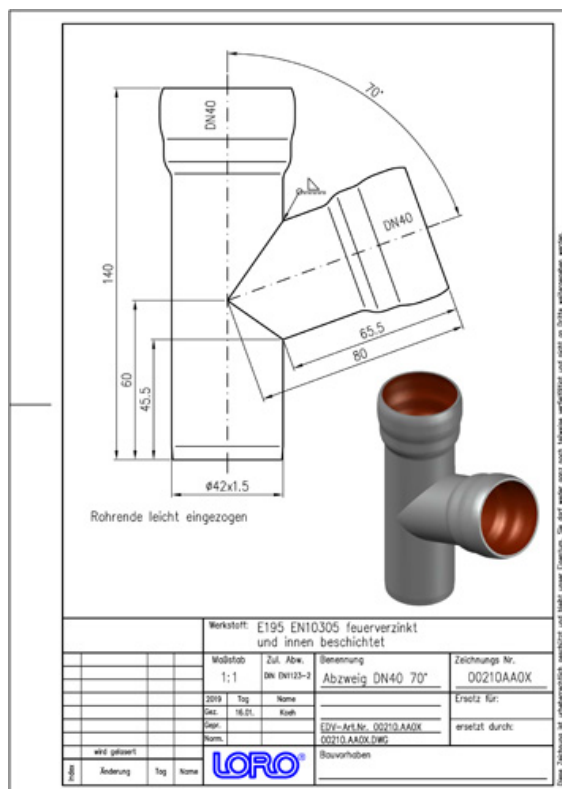

Artikelgegevens

EAN-code	4038088013342
ETIM Klasse	EC003025
Nominale diameter	DN 40, DN 40
Nominale lengte/graad	70
Buitenafmetingen (HxBxL)	51 x 109 x 140 mm
Gewicht	0,30 Kg (STK)
Productgroep	1
Douanetariefnummer	73089098
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

BIM 3D (STEP)

[Maattekening \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)