

## LORO-X BRANCH 70 DEGREE DN 50/50

### LORO-X branch 70 degrees DN 50/50

#### Descrizione

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN50




#### Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088013366               |
| Classe ETIM              | EC003025                    |
| Diametro nominale        | DN 50, DN 50                |
| Lunghezza/grado nominale | 70                          |
| Misure esterne (AxLxP)   | 63 x 134 x 168 mm           |
| Peso                     | 0,50 Kg (STK)               |
| Gruppo prodotti          | 1                           |
| Numero tariffa doganale  | 73089098                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

#### Note d'uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

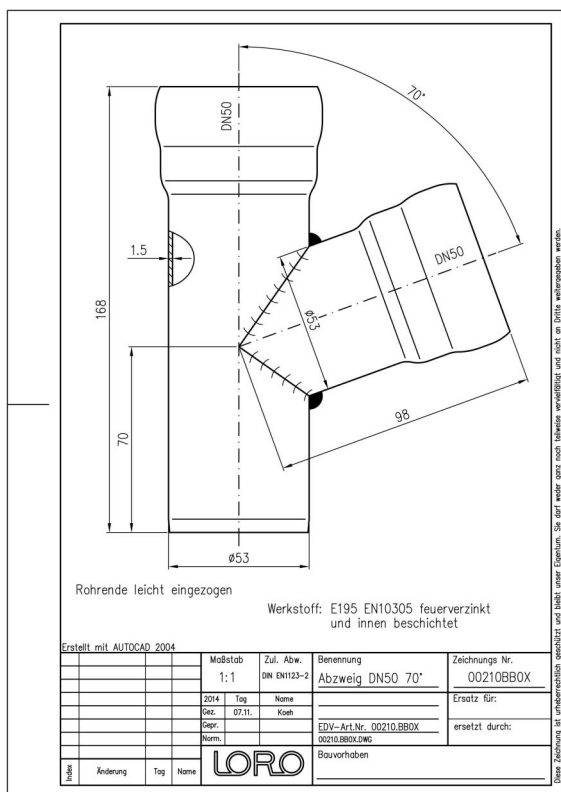

#### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)