LORO-X BRANCH 70 DEGREE DN 100/100

LORO-X branch 70 degrees DN 100/100

Descripción

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN100

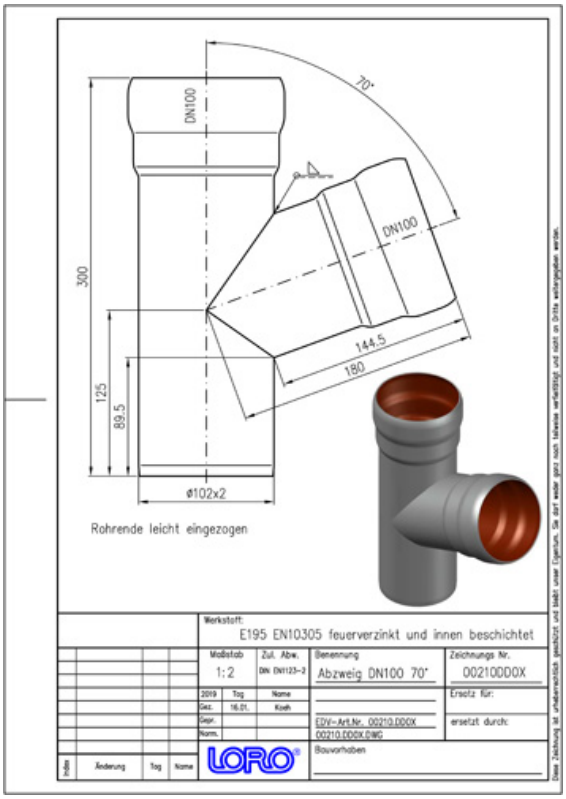

Datos del artículo

Código EAN	**4038088013397**
Clase ETIM	**EC003025**
Diámetro nominal	**DN 100, DN 100**
Longitud/grado nominal	**70**
Medidas exteriores (AxAxL)	**118 x 247 x 300 mm**
Peso	**2,40 Kg (STK)**
Grupo de productos	**1**
Número de arancel aduanero	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Descargas

Alles online

[Instrucciones de instalación (PDF)](#)
[Dibujo dimensional (PDF)](#)
[Folleto (PDF)](#)
[Certificado (PDF)](#)
[CAD 2D (DXF)](#)
[CAD 3D (DWG)](#)
[BIM 3D (STEP)](#)
[BIM IFC4 (parametrisch)](#)
[BIM 3D (IFC)](#)