LORO-X BRANCH 70 DEGREE DN 125/125

LORO-X branch 70 degrees DN 125/125

Popis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN125

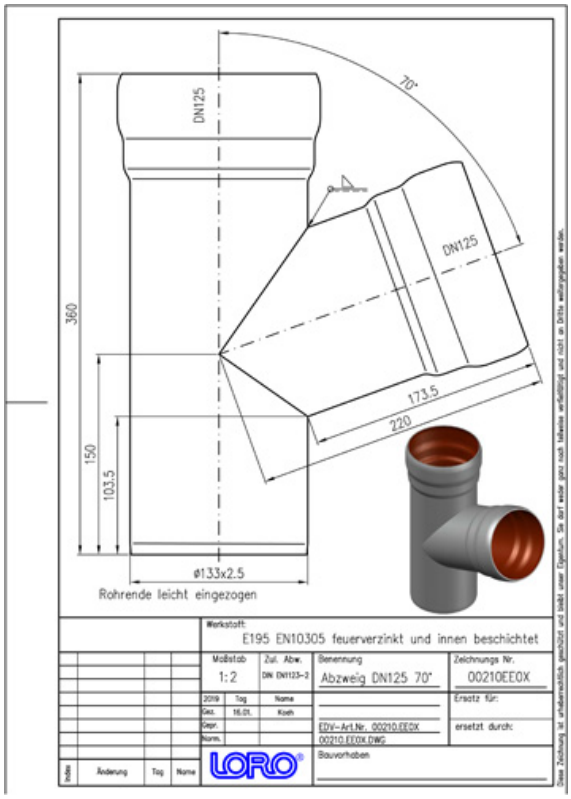

Údaje o artikli

EAN kód	**4038088013403**
ETIM trieda	**EC003025**
Menovitý priemer	**DN 125, DN 125**
Menovitá dĺžka/stupeň	**70**
Vonkajšie rozmery (VxŠxH)	**152 x 308 x 360 mm**
Hmotnosť	**4,20 Kg (STK)**
Skupina produktov	**1**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Na stiahnutie

Alles online

- Návod na montáž (PDF)
- Certifikát (PDF)
- BIM 3D (STEP)
- Rozmerový výkres (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Prospekt (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)