


LORO-X BRANCH 70 DEGREE DN 150/150

LORO-X branch 70 degrees DN 150/150

Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN150

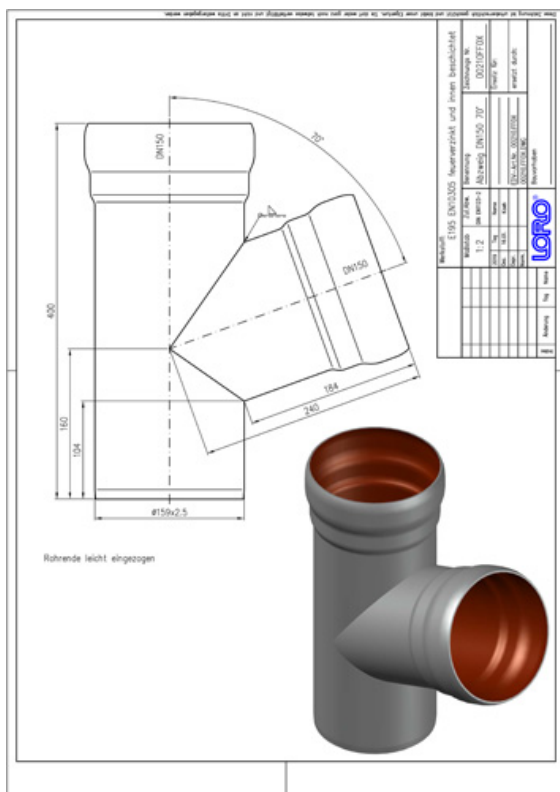

Podatki o izdelku

EAN koda	4038088013410
ETIM razred	EC003025
Nazivni premer	DN 150, DN 150
Nazivna dolžina/stopinja	70
Zunanje mere (VxŠxD)	181 x 346 x 400 mm
Teža	5,40 Kg (STK)
Skupina izdelkov	1
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

Certifikat (PDF)

BIM 3D (STEP)

[Merska risba \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)