

LORO-X BRANCH 45 DEGREE DN 50/50

LORO-X branch 45 degrees DN 50/50

Kuvaus

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




Tuotetiedot

EAN-koodi	4038088013502
ETIM-luokka	EC003025
Nimellishalkaisija	DN 50, DN 50
Nimellispituus/-aste	45
Ulkomitat (KxLxS)	63 x 143 x 143 mm
Paino	0,60 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

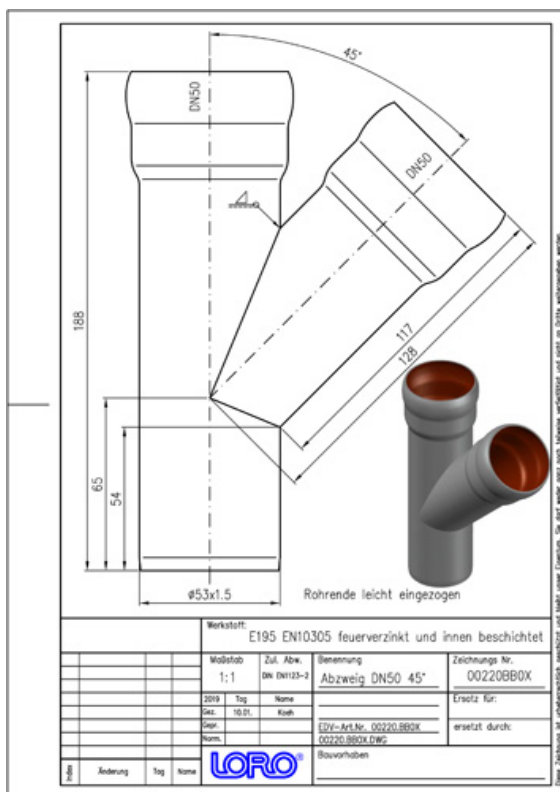

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

Hvåksyntå (PDF)

BIM 3D (STEP)

BIM Revit (RFA)

[Mittapiirustus \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Esite \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)