


## LORO-X BRANCH 45 DEGREE DN 50/50

LORO-X branch 45 degrees DN 50/50

### Beschrijving

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50

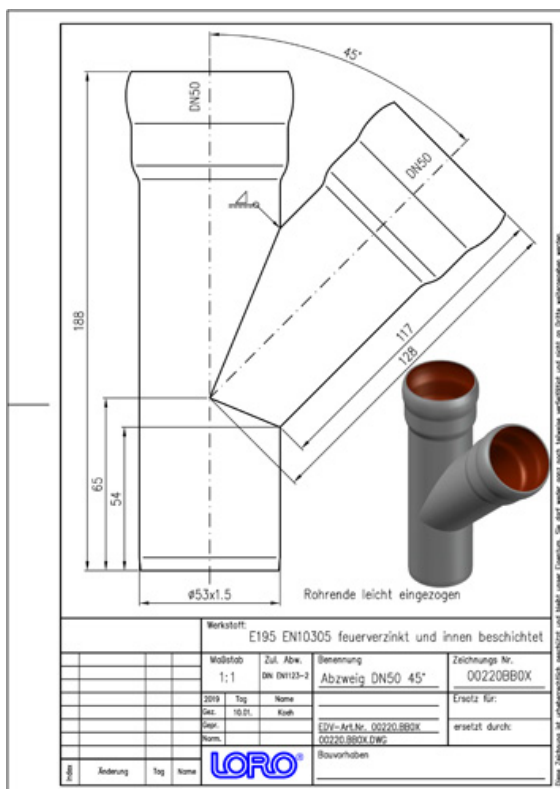

### Artikelgegevens

|                          |                             |
|--------------------------|-----------------------------|
| EAN-code                 | 4038088013502               |
| ETIM Klasse              | EC003025                    |
| Nominale diameter        | DN 50, DN 50                |
| Nominale lengte/graad    | 45                          |
| Buitenafmetingen (HxBxL) | 63 x 143 x 143 mm           |
| Gewicht                  | 0,60 Kg (STK)               |
| Productgroep             | 1                           |
| Douanetariefnumme        | 73089098                    |
| r                        |                             |
| Materiaal / Kleur        | Stahl feuerverzinkt, Silber |

### Gebruiksaanwijzing

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

### Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)