


## LORO-X BRANCH 45 DEGREE DN 50/50

### LORO-X branch 45 degrees DN 50/50

## Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50

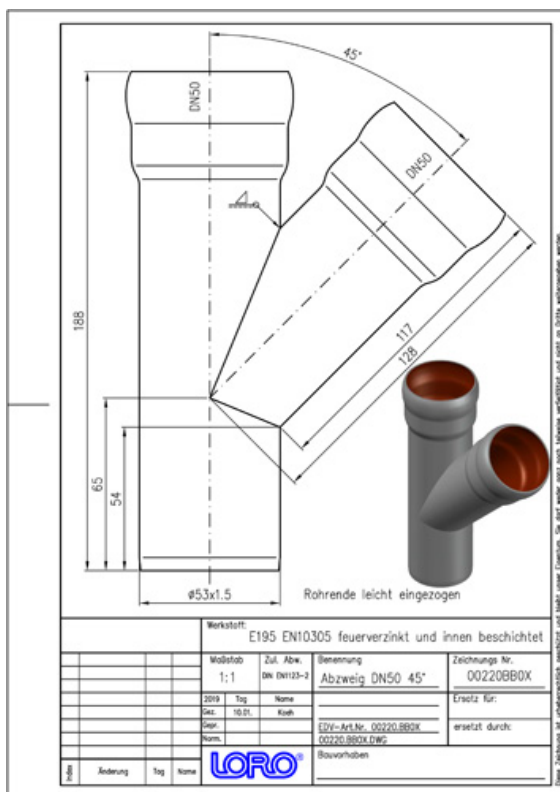

## Artikeldata

|                        |                             |
|------------------------|-----------------------------|
| EAN-kode               | 4038088013502               |
| ETIM Klasse            | EC003025                    |
| Nominel diameter       | DN 50, DN 50                |
| Nominel<br>længde/grad | 45                          |
| Ydermål (HxBxL)        | 63 x 143 x 143 mm           |
| Vægt                   | 0,60 Kg (STK)               |
| Produktgruppe          | 1                           |
| Toldtarifnummer        | 73089098                    |
| Materiale / Farve      | Stahl feuerverzinkt, Silber |

## Brugsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

## Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[Certifikat \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)