

LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Description

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70



Article information

EAN Code 4038088034484

ETIM Class EC003025

Nominal diameter DN 70, DN 70

Nominal length/degree 45

Outside measurements (HxWxL) 84 x 1904 x 255 mm

Weight 1,10 Kg (STK)


Product group 1

Customs tariff number 74121000

Material / Color Kupfer, Kupfer

Usage note

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

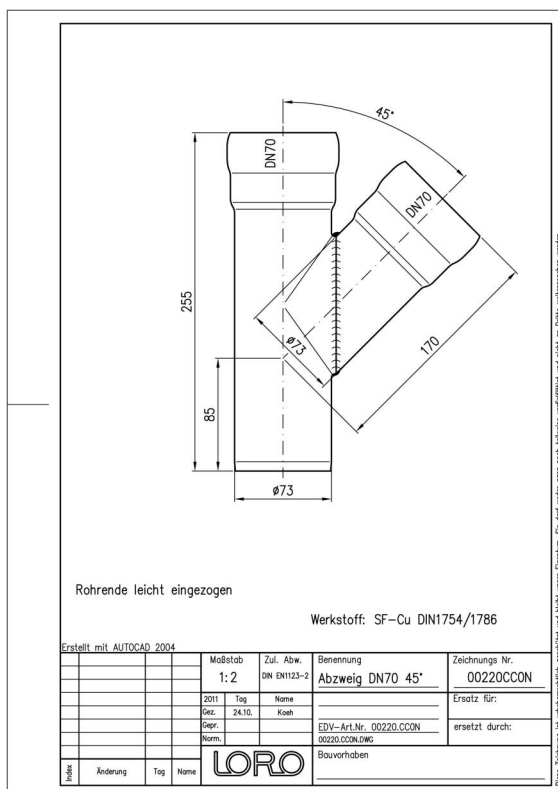

Downloads



Alles online

[Installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[CAD drawing \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)