

LORO COPPER BRANCH 45 DEGREE DN 70/70

LORO-X branch copper 45 degrees DN 70/70

Beskrivning

LORO-N branch, made of copper, in accordance with DIN 1754/1786, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, 45 degrees, DN70




Artikeldata

EAN-kod	4038088034484
ETIM-klass	EC003025
Nominell diameter	DN 70, DN 70
Nominell längd/grad	45
Yttermått (HxBxL)	84 x 1904 x 255 mm
Vikt	1,10 Kg (STK)
Produktgrupp	1
Tullnummer	74121000
Material / Färg	Kupfer, Kupfer

Användningsanvisning

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300

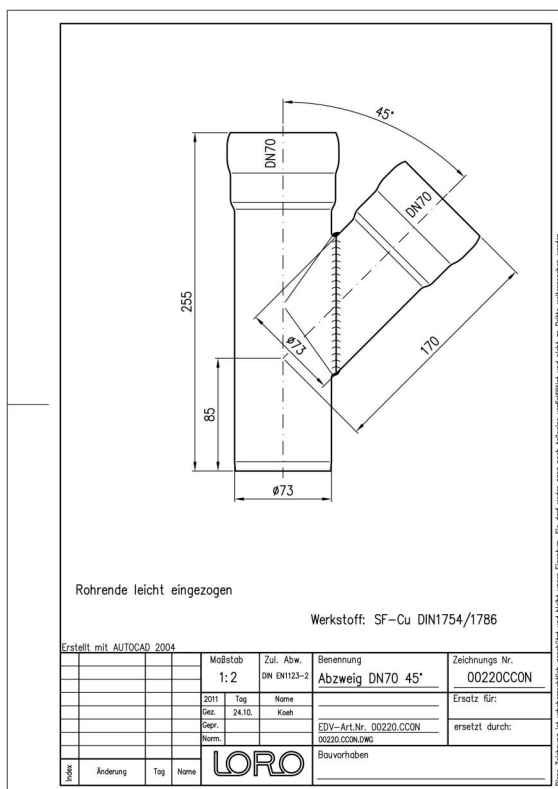

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Måttitning \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Broschyr \(PDF\)](#)

BIM 3D (STEP)